

LIGHTING & POWER

 [back to Section List](#)



110V & 230V Plugs & Accessories

1182-1183

Cable Reels

1178-1180

Extension Leads & Plugs

1181-1183

Floodlights

1165-1172

Generators

1185-1187

Head Torches

1149-1151

Inspection Lights

1154-1165

Penlights & Pocket Lights

1152-1154

Power Packs

1177

Site Lights

1170, 1172

Torches

1147-1154

Transformers

1183

Under Bonnet Inspection Lights

1173

Vehicle Worklights

1174-1176

Warning Beacons

1174-1175

Wireless Rechargeable LED Inspection Lights

1162-1163

Power Inverters

1184-1185

A NEW

SMD LED



180 LUMENS

A LED140

3W SMD LED Rechargeable 3-in-1 Spotlight

Rechargeable 3W SMD LED 105 Lumen Spotlight and 60 Lumen Lantern. Lantern produces 360° lighting with two settings. SMD LED Desk Lamp producing 180 lumens. Desk Lamp has two settings with adjustable lighting angle. Slide switch and quick release button to change the light function. Charging USB cable included. 3.7V 1.5Ah Li-ion battery.

LED Type:	3W SMD
Lumen Output:	Spotlight; 105lm, Lantern; High - 60lm, Low - 30lm Desk Lamp; High - 180lm, Low - 100lm
Operating Time:	Spotlight; 8hr, Lantern; High - 6hr, Low - 8hr Desk Lamp; High - 6hr, Low - 8hr
Charging Time:	4hr
Power:	3W
IP Rating:	IP20
Battery:	3.7V 1.5Ah Li-ion

D

SMD LED



120 LUMENS

D LED452IS

3.6W SMD LED Intrinsically Safe ATEX/IECEx Approved Flashlight

Single high power 3.6W SMD LED produces extremely bright, white light with an output of 120/32 lumens (high/low) and a working range up to 172m. Operating time 6/69 hours. Three mode push-button for high, low and off settings. Intrinsically safe for use in hazardous locations. Lightweight, tough and durable casing which will sustain high impacts and drops. Screw fastener prevents inadvertent opening of battery container in hazardous environments. Built-in gas release vent. Features wrist lanyard connection.

LED Type:	3.6W SMD
Lumen Output (High/Low):	120/32lm
Operating Time (High/Low):	6/69hr
Range (High/Low):	172/85m
Battery:	4 x AA (not included)

B LED



35 LUMENS

B AK427

0.5W LED Spotlight

Spotlight with strong composite case and sealed switch. Long lasting, energy efficient LED bulb.

LED Type:	0.5W LED
Lens Diameter:	Ø89mm
Lumen Output:	35lm
Battery:	1 x PJ996 (not included)

C LED3WB

3W SMD LED Rechargeable Bulb

Ideal for camping or emergency situations. Operates 14 SMD LEDs that feature five selectable light settings. 3.7V 1.2Ah Lithium-ion rechargeable battery for up to 3 hours operating time on its highest setting. Produces up to 170 lumens. Built-in hanging hook for hands-free applications. Micro USB cable supplied.

C NEW



170 LUMENS

SMD LED

LED Type/Power:	14 x 0.2W SMD/3W
Lumen Output (High/Med/Low):	170/80/40lm
Charging Time:	4/5hr
Functions:	High/Med/Low/Blink
Operating Time:	High - 3hr
Battery:	3.7V 1.2Ah Li-ion

E

SMD LED

150 LUMENS

Magnetic



E TBL450

1.5W SMD LED Rechargeable Magnetic Toolbox Light

Robust aluminium housing incorporating 1.5W SMD LEDs to illuminate the trays in a toolbox. With a width of 450mm the light is fitted with two sliding magnetic brackets which can rotate 180° to direct the light as required, whilst also giving the flexibility to attach the light to any ferrous metal avoiding badges and logos. Features two light settings with an operating time of up to 12 hours. Powered by a rechargeable 3.7V 2.2Ah lithium-ion battery and includes an LED charging indicator. Supplied with a 1m USB charging cable.

LED Type:	1.5W SMD
Lumen Output (High/Low):	150/100lm
Operating Time (High/Low):	6/12hr
Charging Time:	3hr
Battery:	3.7V 2.2Ah Li-ion
Dimensions (W x D x H):	450 x 50 x 30mm

A **COB LED** **150 LUMENS**



A LED069
3W LED & 3W COB LED
Torch/Inspection Light

Twin function light, features a powerful 3W LED directional torch and, by extending the body of the torch, an automatic on/off 3W COB LED inspection lamp. A strong magnet in the base allows for hands-free use.

LED Type:	3W COB + 3W LED
Lumen Output (Top/Side):	150/50lm
Minimum Length:	165mm
Maximum Length:	220mm
Battery:	4 x AAA (not included)

B **SMD LED** **720 LUMENS**



B LED449
10W SMD LED Rechargeable
Aluminium Torch - Adjustable Focus

Single 10W SMD LED produces extremely bright, white light with an output of 720 lumens and a working range up to 200m. Focus type can be changed from spotlight to wide area by a twist action of the head. Lightweight aluminium housing. Two power options, full power and 30% energy saving mode. Powered by a rechargeable 3.7V 2Ah lithium-ion battery. Supplied with micro USB charging lead.

LED Type:	10W SMD
Lumen Output (High/Low):	720/210lm
Operating Time (High/Low):	2.5/5hr
Working Range:	200m
Battery:	3.7V 2Ah Li-ion

C **SMD LED** **3500 LUMENS**



C LED451
30W Super Boost SMD LED
Rechargeable Pocket Light

30W SMD LED produces extremely bright, white light with an output of 1400 lumens, with a super boost output of 3500 lumens for 35 seconds. Working range up to 250m. Powered by a rechargeable 3.7V 2Ah lithium-ion battery with a charging time of up to 5hrs. Supplied with micro USB charging lead. *****WARNING***** Please keep out of reach of children, as lens generates heat on Super Boost setting.

LED Type:	3 x 10W SMD LED
Lumen Output:	Super Boost; 3500lm for 35 seconds; High; 1400lm
Operating Time:	Super Boost for 35 seconds + High; 1.2hr, Low; 10hr
Charging Time:	4/5hr
Range:	250m
Battery:	3.7V 2Ah Li-ion

D **SMD LED**



750 LUMENS **5W**



1000 LUMENS **10W**

F **SMD LED**



2000 LUMENS **20W**

G **COB LED**



4000 LUMENS **60W**



D-G SEE BELOW

Rechargeable Aluminium Torches with Adjustable Focus

Super powerful LEDs produces extremely bright, white light with an outputs ranging from 750 - 4000 lumens and a working range of 100-200m. Focus type can be changed from spotlight to wide area by a twist action of the head. Lightweight aluminium housing. Two power options, full power and 30% energy saving mode. Powered by rechargeable lithium-ion batteries. Strong magnet on the base. Supplied with micro USB charging lead.

	D	E	F	G
Model No:	LED4491	LED4492	LED4493	LED4494
LED Type:	5W SMD	10W SMD	20W SMD	60W COB
Lumen Output (High/Low):	750/225lm	1000/300lm	2000/600lm	4000/1200lm
Operating Time (High/Low):	2/4hr	2/4hr	2/4hr	4/8.5hr
Range:	100m	100m	200m	100m
Battery:	3.7V 2Ah Li-ion	3.7V 2Ah Li-ion	7.4V 2Ah Li-ion	7.4V 4Ah Li-ion

A NEW

300 LUMENS



COB LED SMD LED

A HT300R
3W COB & 1W SMD LED Rechargeable Headlight with Sensor

3W COB + 1W SMD Rechargeable headlight with sensor function. Also including 3 SMD LEDs producing 300 Lumens. Can also act as a separate mini worklight with magnet. 3.7V 1000mAh lithium-polymer battery with 0.5m USB cable included. Charging and battery indicator capabilities. Maximum 4hr runtime using COB LED.

LED Type:	COB + SMD
LED Quantity:	1 COB, 3 SMD
Lumen Output:	COB/SMD 150/300lm
Operating Time:	COB/SMD 4/2hr
Charging Time:	3-4hr
Battery:	3.7V 1000mAh Li-Poly battery

B NEW

250 LUMENS



SMD LED

B HT301R
2.5W SMD LED Rechargeable Head Torch

Hands-free 2.5W SMD LED head torch to direct light as required. Two power settings - high and 60% power with an output of 250/150lm. Green LED charge indicator. Extendable arms with foam pads for added comfort. Supplied with Type-C USB charging cable.

LED Type:	2.5W SMD
Lumen Output (High/Low):	250/150lm
Operating Time (High/Low):	2/3.5hr
Charging Time:	3.5hr
Battery:	3.7V 1.6Ah Li-ion



C NEW

350 LUMENS



COB LED

C HT104R
5W COB & 3W LED Bulb Head Torch with Auto-Sensor

5W COB LED Striplight along front of adjustable headband with 3W LED bulb on one side. Features auto-sensor which is activated by pressing the sensor button next to the power button. Supplied with USB Type-C charging lead.

LED Type:	5W COB + 3W LED Bulb
Lumen Output:	COB/ LED Bulb 350/120lm
Operating Time (High/Low):	2/6hr
Charging Time:	2.5hr
Battery:	3.7V 1.2Ah Li-Poly

D

SMD LED



E

Wireless

D-E SEE BELOW
1W SMD LED USB Rechargeable Beanie Hats

Warm and comfortable beanie hats with a removable SMD spotlight. Features three light settings - full light (100%) medium light (75%) and low light (50%). Positioning of the LED gives a sufficient beam of light ahead of the user. Removable lamp is chargeable via a USB port. Powered by a rechargeable 3.7V 300mAh lithium-polymer battery. Model No. LED185W includes wireless headphones for phone calls and music 2.4GHz transfer speed up to 10m.

LED Type:	1W SMD
Lumen Output (High/Low):	120/60lm
Operating Time (High/Low):	2/5hr
Charging Time:	3hr
Battery:	3.7V 300mAh Li-Poly
Model No:	Wireless Headphones:
D LED185	X
E LED185W	✓

F NEW

320 LUMENS



SMD LED

F NT320LED
3W SMD Rechargeable Neck Torch

3W SMD LED Rechargeable two mode neck torch. 320 Lumen output and maximum 6hr run time. Neck light is lightweight, adjustable and comfortable around your neck. Two light head can be adjusted and locked independently up to 120°. Three colour LED battery level indicator. Supplied with Type-C USB charging cable.

LED Type:	3W SMD
Lumen Output (High/Low):	320/150lm
Operating Time Output (High/Low):	6/2hr
Charging Time:	2.5hr
Battery:	3.7V 700mAh Li-ion



A HT03LED
3W SMD LED & 2 Red LED Head Torch

Hands-free LED spotlight. Features one high power 3W white LED for general use and two red LEDs, which can be used at night to help maintain night vision. Adjustable inclination to direct light source as required and adjustable headband. Push-button mode activation.

LED Type:	3W SMD + 2 Red LED
Lumen Output:	120lm
Battery:	3 x AAA (not included)



B HT101
3W COB LED Head Torch

Hands-free 3W COB LED spotlight with adjustable inclination to direct light as required. Main light features high, low and flash settings. Produces up to 200 lumens. Adjustable headband and foam brow pad for added comfort.

LED Type:	3W COB
Lumen Output:	200lm
Battery:	3 x AAA (not included)



C HT452IS
1.8W SMD LED Intrinsically Safe ATEX/IECEx Approved Head Torch

Single high power 1.8W SMD LED produces extremely bright, white light with an output of 216/100 lumens (high/low) and a working range up to 100m. Three mode push-button for high, low and off settings. Operating time 5/12 hours. Intrinsically safe for use in hazardous locations. Lightweight, tough and durable casing which will sustain high impacts and drops. Adjustable headband attaches to hard hat or head. Light angle adjustable by up to 90° to suit every situation. Built-in gas release vent. Battery compartment secured with screws to prevent inadvertent opening in hazardous area.

LED Type:	1.8W SMD
Lumen Output (High/Low):	216/100lm
Battery:	3 x AAA (not included)



D-F SEE BELOW
2W COB LED Rechargeable Head Torches with Auto-Sensor

New design 360° multifunction COB LED rechargeable head torches. Headband can also be used as a wristband. When the band is removed, the worklight can also be used as a clip light or standalone table light. One button includes five different lighting options. First press is 100% white light, second dims to 40% white light, third is red warning light (1W COB LED) and fourth is red warning flash, which makes it ideal for cycling. Holding the button enables auto-sensor function to switch on/off just by waving hand in front. Adjustable head/wrist band and foam brow for added comfort. Powered by 3.7V 0.5Ah Li-Poly battery. Supplied with micro USB charging cable. For display box of 12, see page 1164.

LED Type:	2W COB
Lumen Output (High/Low):	160/60lm
Operating Time (High/Low):	2.5/4hr
Charging Time:	1.5hr
Battery:	3.7V 0.5Ah Li-Poly

Model No:	Colour:
D LED360HT	Black
E LED360HTG	Green
F LED360HTR	Red



G HT105LED
3W SMD LED Rechargeable Head Torch

Hands-free SMD LED spotlight with adjustable inclination to direct light as required. Features three settings - full light, low light or flashing. Adjustable headband and foam brow for added comfort. Supplied with micro USB charging lead.

LED Type:	3W SMD
Lumen Output (High/Low):	220/66lm
Operating Time (High/Low):	2.5/8hr
Charging Time:	4hr
Battery:	3.7V 1.5Ah Li-ion

A

450 LUMENS



B

350 LUMENS



COB LED

A-B SEE BELOW

5W COB LED Head Torches with Auto-Sensor

Hands-free 5W COB LED spotlights with 40° angle adjustment. Dimmer switch allows brightness to be adjusted from 20% to 100%. Main light has one switch with 4-functions, on, flash, auto-sensor and off. Hold down switch to enable auto-sensor function which will allow turning on/off just by waving hand in front. Rear of strap includes a red LED warning light which has two functions, flash or on, ideal for a cycling light. Adjustable headband and foam brow for added comfort. Includes a battery charging level indicator. Model No. HT111R is powered by rechargeable 3.7V 2.2Ah Li-ion battery, includes a battery charging level indicator and is supplied with micro USB charging lead. Model No. HT111LED is powered by 3 x AA batteries (not included).

	A	B
Model No:	HT111R	HT111LED
LED Type:	5W COB	5W COB
Lumen Output (High/Low):	450/110lm	350/80lm
Operating Time (High/Low):	2.5/8.5hr	-
Charging Time:	3.5hr	n/a
Battery:	3.7V 2.2Ah Li-ion	3 x AA (not included)

C

SMD LED



125 LUMENS

C HT102R

3W SMD LED Rechargeable Head Torch with Auto-Sensor

Hands-free head torch with adjustable 3W SMD LED spotlight to direct light as required. One switch features an auto-sensor to activate light with the wave of a hand and standard on/off switch. Produces up to 125 lumens. Other switch has four options - full, 50% energy saving mode, flash and red light. Powered by a rechargeable 3.7V 1.2Ah lithium-ion battery. Supplied with micro USB charging lead.

LED Type:	3W SMD
Lumen Output (High/Low):	125/73lm
Operating Time (High/Low):	3/4hr
Charging Time:	4hr
Battery:	3.7V 1.2Ah Li-ion

D

SMD LED

180 LUMENS



D HT106LED

3W SMD LED Head & Hat Torch with Auto-Sensor

Hands-free 3W SMD LED spotlight with adjustable inclination to direct light as required. Features auto-sensor to switch on/off just by waving hand in front. Alternatively can be overridden to stay on/off by push-button. Two brightness settings. Adjustable headband and foam brow for added comfort. Powered by rechargeable lithium-polymer 3.7V 1.5Ah battery. Supplied with micro USB charging lead.

LED Type:	3W SMD
Lumen Output (High/Low):	180/60lm
Operating Time (High/Low):	3/9hr
Charging Time:	4hr
Battery:	3.7V 1.5Ah Li-Poly



A-D & F Auto-sensor feature.

F

SMD LED



360 LUMENS

F HT108LED

5W SMD LED Rechargeable Head Torch with Auto-Sensor

Hands-free head torch with adjustable 5W SMD LED spotlight to direct light as required. Features auto-sensor to activate light with the wave of a hand and standard on/off switch. Two power options of full and a 30% energy saving mode. Powered by rechargeable 3.7V 2Ah lithium-ion battery. Supplied with micro USB charging lead.

LED Type:	5W SMD
Lumen Output (High/Low):	360/100lm
Operating Time (High/Low):	2/6hr
Charging Time:	6hr
Battery:	3.7V 2Ah Li-ion

E

SMD LED

100 LUMENS



E HT103LED

3W SMD LED Head & Hat Torch

3W SMD LED with adjustable inclination to direct light as required. Features optical zoom for dissipating the spread of light. Removable light with clip-on hat function. Adjustable headband and foam brow pad for added comfort. Push-button on/off switch.

LED Type:	3W SMD
Lumen Output:	100lm
Battery:	3 x AAA (not included)



A-B & D

A NEW SMD LED



30 LUMENS


Batteries Included

A LED091

1W SMD LED Penlight 9-in-1 Multi-Tool

Produces bright white light from single 1W SMD LED. Sliding action light focus can be adjusted from spotlight to wide area. Strobe light function for emergencies. Multi-tool function includes Phillips screwdriver, slotted screwdriver, bottle opener, whistle, ball pen and safety hammer. Ideal for storing in glove box.

LED Type:	1W SMD
Lumen Output:	30lm
Operating Time:	2.5hr
Battery:	3 x LR44 (included)

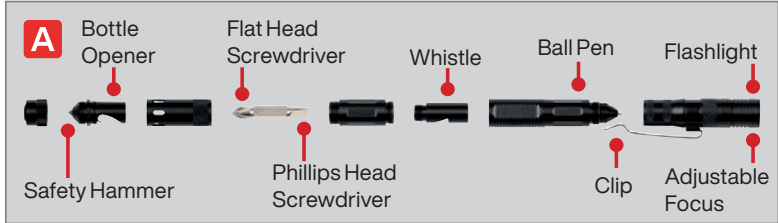

C COB LED SMD LED



50-55 LUMENS

C LED016

3W SMD & 1W COB LED Aluminium Penlight

Powerful, precise and pocket-sized penlight. 1W COB gives extremely bright light with up to 50 lumen output. 3W SMD side light with up to 55 lumen output. On/off fingertip switch.

LED Type:	3W SMD + 1W COB
Lumen Output:	SMD/COB 55/50lm
Length:	142mm
Operating Time:	3hr
Battery:	1 x AAA (not included)



50 LUMENS

B LED043

0.5W LED Aluminium Penlight

Powerful, precise and pocket-sized penlight. 0.5W LED gives extremely bright light with up to 50 lumen output. On/off fingertip switch.

LED Type:	0.5W LED
Lumen Output:	50lm
Length:	130mm
Battery:	2 x AAA (not included)

E NEW Ultraviolet



COB LED SMD LED 450 LUMENS

E LED450UV

5W COB & 3W SMD LED Rechargeable UV Penlight with Laser Pointer

Professional aluminium design that produces an ultraviolet light for fault finding with fluorescent dyes used in leak detection. 5W COB side floodlight producing 450 lumens. Also featuring a 3W SMD tail light and type 3R laser. Rechargeable 3.7V 800mAh Li-ion battery with a Type-C charging cable. Features a 120° rotating metal clip with a strong magnet for easy hands-free use. Also includes dimming switch.

D COB LED




280 LUMENS

D LED125

3W COB LED Penlight Torch

Professional aluminium design, features pocket/belt clip with integrated magnet for hands-free operation. Produces up to 280 lumens. Ideal for use in the workshop, garage and home.

LED Type:	3W COB
Lumen Output:	280lm
Length:	162mm
Operating Time:	1.5/2hr
Battery:	3 x AAA (not included)

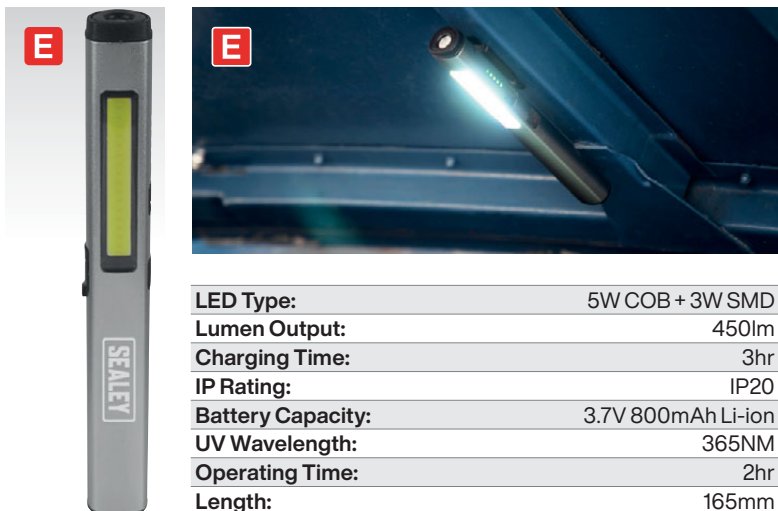

LED Type:	5W COB + 3W SMD
Lumen Output:	450lm
Charging Time:	3hr
IP Rating:	IP20
Battery Capacity:	3.7V 800mAh Li-ion
UV Wavelength:	365NM
Operating Time:	2hr
Length:	165mm

A NEW



COB LED

500 LUMENS

Magnetic



A LED500SB

3W COB LED Aluminium Mini Hand Torch Pocket Inspection Light

Side-mounted push-button to switch between two brightness settings of 100 or 300 lumens. Press and hold button for 500 lumens super beam. Features a magnet on the end, along with a metal belt clip on the back for hands-free operation. Micro USB charging port. Supplied with charging lead.

LED Type:	3W COB
Lumen Output:	500lm
Charging Time:	2.5hr
Operating Time (High/Low):	1.5/3hr
Length:	89mm
Battery:	3.7V, 600mAh Li-ion

B



COB LED

SMD LED

220 LUMENS

Ultraviolet

Magnetic


B LED220UV

3W COB & 1W SMD LED Rechargeable Aluminium Pocket Inspection Light with UV

Powerful 3W COB with 1W SMD, USB rechargeable lithium-ion battery with small green/red charging indicator light. Made from aluminium, anodized and finished with rubber coating for a more premium feel. A strong magnet in the pocket/belt clip allows for hands-free use as well as a second strong magnet in the base. Features two longwave UV-A SMDs at 390-400nm.

LED Type:	3W COB, 1W SMD, 2 x UV-A 390-400nm SMD
Lumen Output:	220lm
Charging Time:	3hr
Operating Time:	Worklight; 3hr, Torch; 7hr
Length:	110mm
Battery:	3.7V 2.2Ah Li-ion

C

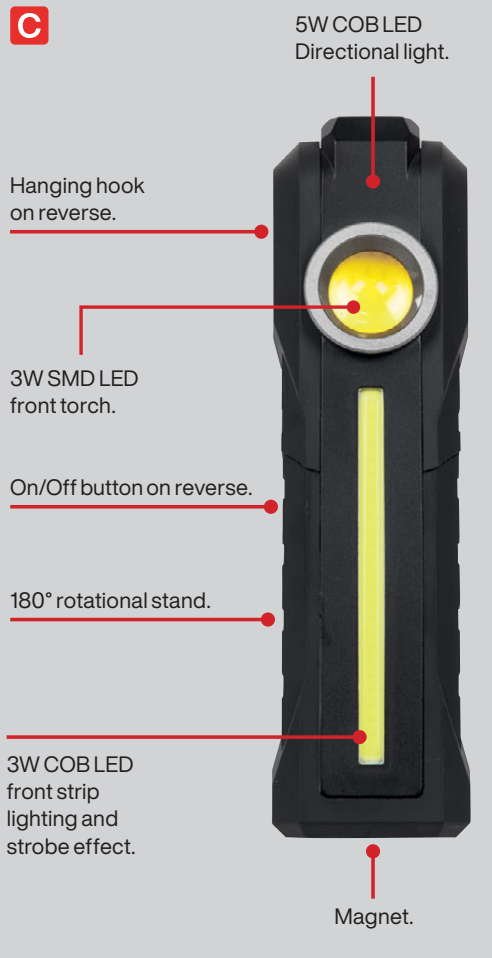

C NEW



COB LED

SMD LED

300 LUMENS

Magnetic



C LED316

5W COB & 3W SMD LED Rechargeable 3-in-1 Inspection Light

5W COB LED Directional light, 3W SMD LED front torch, 3W COB LED front strip lighting and strobe effect. Also featuring 180° rotational stand, magnet, hook and clip for multiple uses. Supplied with Micro USB charging lead. Maximum of 300 lumens with a 2.5hr run time. Lithium-ion battery with charge indicator.

LED Type:	2 x COB + 1x SMD
Lumen Output:	300lm
Operating Time:	2.5 - 7hr
Charging Time:	2.5hr
Battery:	3.7V 1.5Ah Li-ion

D



D AK3305

3 LED Wind-Up Rechargeable Torch

Bright LED light available under all conditions with 30 minutes illumination from one minute's winding. Ideal for outdoor activities and as an emergency torch in the home or car. Includes a charging outlet port with adaptors to micro USB capable of charging mobile phones. Two switchable levels of brightness.

LED Type:	3 LED
Operating Time:	1 LED - 30min, 3 LEDs - 15min

A-C SEE BELOW

COB & SMD LED Rechargeable Slim Pocket Lights

Slimline pocket lights for use in confined spaces. Inspection arm can be folded 180° for hands-free use. Super bright COB and SMD LED, 6000-7000k, 80+CRI. High-impact plastic housing with aluminium light and a strong magnet on the bottom. Rechargeable high quality 3.7V 700mAh lithium-ion battery with a charging time of 2.5hr. Flashing warning light when battery is low. Includes LED indicator - flashes green for charging, continuous green for full charge. Supplied with USB charging cable. Available in blue, red and green.

LED Type:	2 x COB + 1 x SMD
Lumen Output Top/Front(High/Low)/Rear:	80/(200/100)/180lm
Operating Time Top/Front(High/Low)/Rear:	3/(1.5/3.5)/2hr runtime
Charging Time:	2.5hr
Length Folded:	165mm
Length Extended:	300mm
Battery:	3.7V 700mAh Li-ion
Model No:	Colour:
A LED01B	Blue
B LED01R	Red
C LED01G	Green



COB LED
SMD LED
200 LUMENS
DAYLIGHT EFFECT **CRI 80**



D LED02G

COB & SMD LED Rechargeable Aluminium Folding Pocket Light

Slimline pocket light for use in confined spaces. Durable aluminium housing. Inspection arm can be folded 180°. Super bright COB and SMD LED, 6500k. Rechargeable high quality 3.7V 2.6Ah lithium-ion battery. LED Indicators - flash green for charging and continuous green for fully charged. High-impact IK07 Rated. Strong magnet on base of handle for hands-free use.

LED Type:	2 x COB + 1 x SMD
Lumen Output Top/Front(High/Low) /Rear(High/Low):	120/(800/150lm)/(400/120lm)
Operating Time:	Top Spotlight; (120lm) (8hr), Front Light; (800/150lm) (2.5hr/8hr), Rear Light; (400/120lm) (4/9hr)
Charging Time:	4hr
Length Folded:	162mm
Length Extended:	304mm
Battery:	3.7V 2.6Ah Li-ion




D NEW

COB LED
SMD LED
800 LUMENS



Charging level indicator.

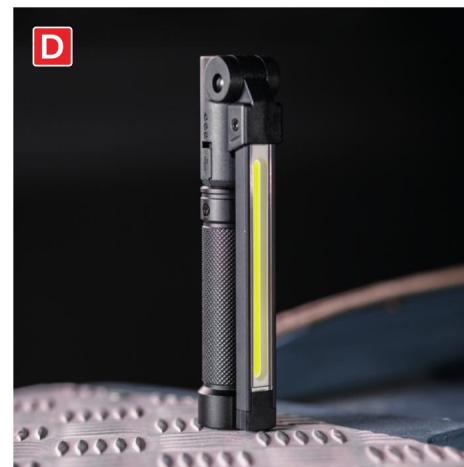



SMD LED
Magnetic
180 LUMENS

A LED307
2.5W & 0.5W SMD LED
Rechargeable Inspection Light

Robust design allows for trouble-free use in busy working environments where being knocked or dropped is common. 2.5W SMD LED on the front producing up to 180 lumens, 0.5W directional torch producing up to 50 lumens and a clear bright white light in enclosed spaces such as an engine bay. 360° Hanging hook and a magnet on rear of light for hands-free applications. 3.7V 1.5Ah Battery allows for use up to 16 hours on directional light and 3 hours on inspection light. Single LED battery indicator for showing when charge is needed and when charging is complete. Supplied with a 12V in-car charger and 3-pin plug mains charger.

LED Type:	2.5W + 0.5W SMD
Lumen Output (Side/Top):	180/50lm
Operating Time (Side/Top):	16/3hr
Charging Time:	5hr
Length:	210mm
Battery:	3.7V 1.5Ah Li-ion



COB LED
SMD LED
250 LUMENS
Magnetic

B LED317
3W COB & 3W SMD LED
Rechargeable Inspection Light

Mini, lightweight light. Featuring a super bright 3W COB LED, which gives an even and constant spread of light, producing up to 250 lumens. 3W High power SMD LED torch producing up to 100 lumens. Integral hanging hook/belt clip and a magnetic base which can rotate through 180° for hands-free applications. Features a battery level indicator. Rechargeable 3.7V 1.2Ah lithium-ion battery for longer life. Supplied with micro USB cable.

LED Type:	3W COB + 3W SMD
Lumen Output:	250/100lm
Operating Time:	3hr
Charging Time:	2.5hr
Battery:	3.7V 1.2Ah Li-ion



Magnetic
COB LED
SMD LED
400 LUMENS



Also available in red, order Model No. LED318R.

C-D SEE BELOW
5W COB & 3W SMD LED Rechargeable
Inspection Lights with Power Bank

Featuring a super bright 5W COB LED light source, which gives an even and constant spread of light, producing up to 400 lumens. 3W High power SMD LED torch producing up to 100 lumens. Integral hanging hook/belt clip and a magnetic base which can rotate through 180° for hands-free applications. Features a battery level indicator. Rechargeable 3.7V 2Ah lithium-ion battery for longer life. Built-in emergency power bank to charge mobile devices. Supplied with micro USB cable.

LED Type:	5W COB + 3W SMD
Lumen Output (Side/Top):	400/100lm
Operating Time (Side/Top):	3/5hr
Charging Time:	3hr
Length:	190mm
USB Output:	5V=1A
Battery:	3.7V 2Ah Li-ion
Model No:	Colour:
C LED318G	Green
D LED318R	Red



COB LED
SMD LED
1000 LUMENS
Magnetic

E LED0131R
Interchangeable 3-in-1 COB LED
Rechargeable Inspection Light

Innovative 3-in-1 worklight. Threaded interface enables user to change between 1000 lumen torch with sliding focus, 450 lumen worklight and a 300 lumen flexi-head. Features a power indicator on the switch and a magnet on the base for hands-free operation. Supplied in a presentation box with a high quality USB cable.

LED Type:	2 x 5W COB + 10W SMD
Lumen Output:	Worklight; 450lm, Flexi-Head Light; 300lm, Torch; 1000lm
Charging Time:	7hr
Operating Time:	Flexi-headlight; 11hr, Worklight; 4.2hr, Torch; 3.3hr
Battery:	3.7V 2200mAh Li-ion



A LED021
5W SMD LED Aluminium Magnetic Flexi-Head Light

5W SMD LED produces 270 lumens. Flexible head bends and holds position to allow bright illumination in confined spaces. Adjustable focus from spotlight to wide area by a push/pull action of the head. Features a magnet in the end for hands-free use.

LED Type:	5W SMD
Lumen Output:	270lm
Range:	100m
Operating Time:	4hr
Battery:	3 x AAA (not included)



B LEDFLEXG
5W COB & 3W SMD LED Flexi Rechargeable Inspection Light

Unique new 360° design made from high-impact materials. High power 5W COB LED main light produces up to 500 lumens in tight spaces like engine compartments. Features a 160mm heavy-duty flexible neck with the ability to hold its position wherever you need it. 3W SMD LED top light produces up to 120 lumens. Features a sturdy base which means it can also be used as a desk lamp. Base includes a strong magnet and 90° folding hook. One switch controls top light, side light and dimmer function. Features LED battery charge level indicator, supplied with USB Type-C cable.



LED Type:	5W COB + 3W SMD
Lumen Output (Side/Top):	50-500/120lm
Operating Time (Side/Top):	2-16/9.5hr
Length:	425mm
Charging Time:	4hr
IP Rating:	IP54
Battery:	3.7V 2.6Ah Li-ion



C LED186
6W COB & 1W SMD LED Rechargeable Slim Inspection Light

Slimline foldout inspection light for use in confined spaces with its slim 9mm thickness. Inspection arm can be rotated 180° and folded. Features 6W COB LED, which produces up to 550 lumens and a 1W SMD LED on the end for use as a directional torch. Main light has two different lighting modes High/Low (550/220 lumens) and the SMD spotlight which has one setting at 80 lumens. Suitable for hands-free operation with a magnet and a hanging hook. Folds away, small and compact, suitable for keeping in your pocket. Powered by a 3.7V 2Ah rechargeable lithium-ion battery, which lasts up to 8hr. Supplied with USB charging lead.

LED Type:	6W COB + 1W SMD
Lumen Output Side(High/Low)/Top:	(550/220)/80lm
Charging Time:	3hr
Operating Time Side(High/Low)/Top:	(2.5/4)/8hr
Maximum Length:	270mm
Minimum Length:	155mm
Battery:	3.7V 2Ah Li-ion



D LED315
15W COB LED Rechargeable Worklight

15W COB rechargeable worklight. 360° Rotatable LED light capable of producing up to 1000 Lumens with a built-in rechargeable lithium-ion 2000mAh battery. Other features include a hanging hook and a strong magnet for multiple applications as well as an emergency power bank function and power level indicator. Supplied with a USB cable for input/output charging, with a run time of 3hrs and charging time of 3-4hrs.


LED Type:	15W COB
Lumen Output (High/Low):	1000/500lm
Lens Diameter:	27mm
Operating Time:	3/4hr
Battery:	3.7V 2Ah Li-ion



A LED180
4W & 1W SMD LED Rechargeable Slim Folding Inspection Light

Slimline foldout inspection light for use in confined spaces, with 6mm minimum thickness. Inspection arm can be rotated 180° and folded back for use as a hands-free inspection light. Features 4W SMD LED which produce up to 400 lumens, operated by a rolling dimmer switch, and a 1W SMD LED in the end for use as a directional torch. Suitable for hands-free operation with three magnets and a hanging hook. Folds away, small and compact, suitable for keeping in your pocket. Powered by a 3.7V 2Ah rechargeable lithium-ion battery which lasts up to 8hr. Supplied with micro USB charging lead.

LED Type:	4W SMD + 1W SMD
Lumen Output (Side/Top):	400/70lm
Operating Time (Side/Top):	3/8hr
Charging Time:	3hr
Minimum Length:	155mm
Maximum Length:	300mm
Battery:	3.7V 2Ah Li-ion

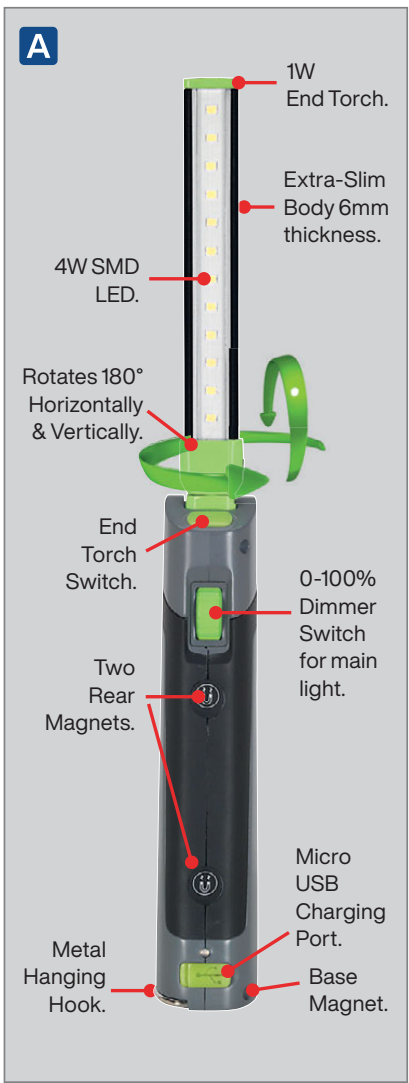

B LED1801
5W & 1W SMD LED Rechargeable Slim Folding Inspection Light

Slimline foldout inspection light for use in confined spaces, with 6mm minimum thickness. Inspection arm can be rotated 180° and folded back for use as a hands-free inspection light. Features 5W SMD LED which produce up to 500 lumens, operated by a rolling dimmer switch, and a 1W SMD LED in the end for use as a directional torch. Suitable for hands-free operation with three magnets and a hanging hook. Folds away, small and compact, suitable for keeping in your pocket. Can be charged in a Sealey docking station - LED1801K (not included). Powered by a 3.7V 2.6Ah rechargeable lithium-ion battery which lasts up to 8hr. Supplied with micro USB charging lead.

LED Type:	5W SMD + 1W SMD
Lumen Output (Side/Top):	500/70lm
Charging Time:	4hr
Operating Time (Side/Top):	3/8hr
Maximum Length:	300mm
Minimum Length:	155mm
Battery:	3.7V 2.6Ah Li-ion



C LED1801K
Rechargeable Floodlight/Folding Inspection Light Docking Station Kit

Docking station kit includes 2 x LED1801 and charging station. Each inspection light has 5W SMD LED (side) and 1W SMD LED (top) producing up to 500 lumens. When both inspection lights are docked it can be used as a floodlight with two light options 50% and 100% producing 500 or 1000 lumens. Each inspection light can extend and is able to rotate 180° making it easy to direct the light. Two charging points with individual LED charging level indicators. Includes 5V=2A mains adaptor and 1m micro USB charging cable.

LED Type:	5W SMD + 1W SMD (x2)
Lumen Output (Side/Top):	1000/140lm
Charging Time:	4hr
Operating Time (Side/Top):	3/8hr
Battery:	2 x 3.7V 2.6Ah Li-ion





Magnetic

300 LUMENS

PATENTED DESIGN & EXCLUSIVE TO SEALEY

A-D SEE RIGHT
360° 3W COB & 1W SMD LED
Rechargeable Inspection Lights

Mini, lightweight lights with exclusive patented design owned by and registered to Sealey. Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Featuring a super bright 3W COB LED light source, which gives an even and constant spread of light. Produces up to 300 lumens with a CRI-80 rating. Recessed lens for added protection. 1W SMD LED Directional torch located on top of the light, produces up to 100 lumens. Rubber covered magnet in base and swivel hook for hands-free operation. High quality rechargeable 3.7V 1.5Ah lithium-polymer battery for longer life. Supplied with micro USB cable.

LED Type:	3W COB + 1W SMD
Lumen Output (Side/Top):	300/100lm
CRI Rating (Side):	80
Operating Time (Side/Top):	3/6hr
Charging Time:	3hr
Minimum Length:	160mm
Maximum Length:	170mm
Battery:	3.7V 1.5Ah Li-Poly

Model No:	Colour:
A LED3601R	Red
B LED3601	Black
C LED3601G	Green
D LED3601CF	Carbon Fibre Effect

COB LED

SMD LED


DAYLIGHT EFFECT CRI 80



450 LUMENS

PATENTED DESIGN & EXCLUSIVE TO SEALEY


Magnetic



Micro USB charging port



Rubber covered magnetic base



Hanging hook

COB LED



Battery life indicator

CRI 96

Colour Match

E LED360CM
360° Rechargeable Inspection Light
5W COB LED Colour Match CRI 96 - 3 Colour

Handheld rechargeable inspection light with a high Colour Rendering Index (CRI 96) suitable for accurate colour matching. The light produced by the 5W COB LED is ideal for detecting swirls and differences in paint colour when touching up areas of bodywork. Single button features three colour options to choose from - 2700K, 4500K and 6500K at 450 lumens. Fitted with a patented magnetic 360° swivel base and hanging hook for hands-free operation. Features a LED battery level indicator and is powered by a high quality 3.7V 2.6Ah lithium-ion battery. Supplied with micro USB lead.

LED Type:	5W COB
Lumen Output:	450lm
CRI Rating:	96
Operating Time:	2hr
Charging Time:	4hr
IP Rating:	IP65
Battery:	3.7V/2.6Ah Li-ion



A-F SEE RIGHT
360° 7 SMD & 3W SMD LED
Rechargeable Inspection Lights

Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Exclusive patented design owned by and registered to Sealey. Seven super bright SMD LEDs with magnified lens providing up to 400 lumens output with 120° spread of light, illuminating the whole work area. Includes an additional high power 3W LED directional torch. Features two swivel hooks and three rubber covered magnets, two on the rear and one on the end, which allow hands-free operation. High quality 2.2Ah lithium-ion battery for longer life, no memory effect and a much slower discharge than traditional Ni-MH batteries. Supplied with micro USB cable. Display box available, order Model No. LED3602COMBO1.

LED Type:	7 SMD + 3W SMD
Lumen Output Side(High/Low)/Top:	(400/200) /120lm
Operating Time Side(High/Low)/Top:	(3/7)/8hr
Charging Time:	3.5hr
IP Rating:	IP54
Minimum Length:	255mm
Maximum Length:	270mm
Battery:	3.7V 2.2Ah Li-ion

Model No:	Colour:
A LED3602R	Red
B LED3602	Black
C LED3602G	Green
D LED3602B	Blue
E LED3602Y	Yellow
F LED3602CF	Carbon Fibre



600 LUMENS
SMD LED



Magnetic



G-I SEE BELOW
360° 14 SMD & 3W SMD LED Rechargeable Inspection Lights

Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Exclusive patented design owned and registered to Sealey. 14 Super bright SMD LEDs providing up to 600 lumens output with 120° spread of light, illuminating the whole work area. Includes an additional high power 3W LED directional torch. Features two swivel hooks and three rubber covered magnets, two on the rear and one on the end, which allow hands-free operation. High quality 2.6Ah Li-ion battery for longer life, no memory effect and a much slower discharge than traditional Ni-MH batteries. Features a micro USB charging port and is supplied with charging cable. Display box available, order Model No. LED360COMBO2.


LED Type:	14 SMD + 3W SMD
Lumen Output Side(High/Low)/Top:	(600/200)/120lm
Operating Time Side(High/Low)/Top:	(3/6)/8hr
Charging Time:	3.5hr
IP Rating:	IP54
Minimum Length:	260mm
Maximum Length:	280mm
Battery:	3.7V 2.6Ah Li-ion

Model No:	Colour:
G LED360	Black
H LED360G	Green
I LED360R	Red

700 LUMENS
SMD LED
Magnetic



3W LED directional torch.

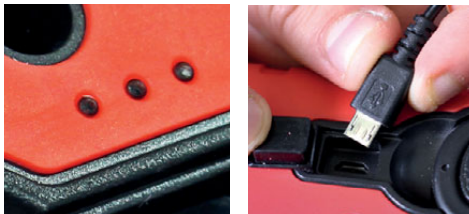

LED battery life indicator. Micro USB charger port.



A-C SEE RIGHT

360° 16 SMD & 3W SMD LED Rechargeable Inspection Lights

Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Exclusive patented design owned by and registered to Sealey. Includes two 3.7V 2.6Ah rechargeable lithium-ion batteries in parallel for up to 15 hours run time. 16 SMD LEDs providing up to 700 lumens output and a 120° spread of light, illuminating the whole work area. Includes an additional 3W LED directional torch. Features two swivel hooks and three rubber covered magnets, two on the rear and one on the end, which allow hands-free operation. Supplied with high quality braided USB cable. Display box available, order Model No. LED360PLUSCOM.

LED Type:	16 SMD + 3W SMD
Lumen Output Side(High/Low)/Top:	(700/350)/150lm
Operating Time Side(High/Low)/Top:	(6/12)/15hr
Charging Time:	7hr
Minimum Length:	256mm
Maximum Length:	276mm
IP Rating:	IP54
Battery:	3.7V 2.6Ah Li-ion (x2)

Model No:	Colour:
A LED360PLUS	Black
B LED360PLUSG	Green
C LED360PLUSR	Red



D-E SEE BELOW

360° 24 SMD & 3W SMD LED Rechargeable Inspection Lights

Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Exclusive patented design owned by and registered to Sealey. Features 24 super bright SMD LEDs with magnified lens providing up to 1000 lumens output with 120° spread of light, illuminating the whole work area. Includes an additional high power 3W LED directional torch. Features two swivel hooks and three rubber covered magnets, two on the rear and one on the end, which allow hands-free operation. Two high quality 3.7V 2.6Ah lithium-ion batteries in parallel for up to 15 hours run time. Supplied with micro USB cable.

LED Type:	24 SMD + 3W SMD
Lumen Output Side(High/Low)/Top:	(1000/300)/150lm
Operating Time Side(High/Low)/Top:	(3/12)/15hr
Charging Time:	7hr
IP Rating:	IP54
Minimum Length:	256mm
Maximum Length:	276mm
Battery:	3.7V 2.6Ah Li-ion (x2)

Model No:	Colour:
D LED3606G	Green
E LED3606R	Red



A LED360FR

360° 36W SMD LED Rechargeable Portable Floodlight

Features patented 360° swivel and tilt function enabling light source to be positioned in any direction. Worklight houses 72 super bright SMD LEDs providing up to 3000 lumens. Features high quality 4.4Ah lithium-ion battery with battery level indicator. 2.1A USB output for use as a power bank. Supplied with mains charger.

LED Type:	72 SMD
Power:	36W
Lumen Output (High/Medium/Low):	3000/1500/750lm
Operating Time (High/Medium/Low):	1.5/2.5/5hr
Colour Temperature:	6500K
Charging Time:	4.5hr
IP Rating:	IP65
Battery:	7.4V 4.4Ah Li-ion



The 360° Family consists of nine styles of lamp, all of which feature our unique and innovative 360° swivel and tilt function, enabling the light source to be positioned in any direction. Exclusive patented design owned and registered to Sealey.



B-C SEE BELOW

360° 12V 8W COB LED Inspection Light

Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Exclusive patented design owned and registered to Sealey. Each light houses a super bright COB LED providing up to 1000 lumens output with 120° spread of light, illuminating the whole work area. CRI 80+ with brightness of 6500K. Features swivel hook and a super strong magnet on the base, which allow hands-free operation.

LED Type:	8W COB
Lumen Output:	1000lm
Charging Time:	2V 1.5Ah Li-ion 60 min, 12V 3Ah Li-ion 105 min, 12V 4Ah Li-ion 140 min

Model No:	Type:	Contents:
B LED36012V	Body Only	Inspection Light
C LED36012VCOMBO1	Combo	LED36012V - Inspection Light CP1200BP - 1.5Ah Battery CP1200MC - Battery Charger



D-G

Magnetic

600 LUMENS


SMD LED



D-G SEE RIGHT

360° 16 SMD & 1W SMD LED Rechargeable Inspection Lights

Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Exclusive patented design owned by and registered to Sealey. Features 16 super bright SMD LEDs providing up to 600 lumens through the adjustable rotary switch and a 1W LED directional torch. Slimline design with minimum thickness of 9mm. Features a single hanging hook, magnetic base allowing hands-free operation and battery level indicator. High quality 2.6Ah 3.7V lithium-ion battery for longer life, no memory effect and a much slower discharge than traditional Ni-MH batteries. Supplied with a high quality braided USB lead. Model No. LED3604UV includes a four LED UV light.

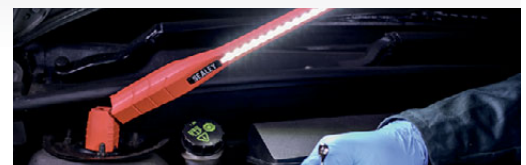

LED Type:	16 SMD + 1W SMD
Lumen Output Side (High/Low)/Top:	(600/50) /120lm
Operating Time Side(High/Low)/Top:	(1.5/16)/10hr
Charging Time:	4hr
IP Rating:	IP54
Minimum Length:	390mm
Maximum Length:	400mm
Battery:	3.7V 2.6Ah Li-ion

Model No:	Colour:
D LED3604UV	Blue (Ultraviolet)
E LED3604G	Green
F LED3604	Black
G LED3604R	Red

A NEW



SMD LED

COB LED

250 LUMENS

Magnetic



A LEDWC03

3W COB & 1W SMD LED Rechargeable Inspection Light Wireless Charging

Fully versatile inspection light with dimming function. Supplied with one strong magnet on the base and two on the back. Front light produces up to 250 lumens dimming all the way down to 15 lumens. The top spotlight acts as a torch at 100 lumens. Operating time is 3hr for the main light and up to 6hr on the spotlight. Supplied with Type-C USB cable. Model No's WCB3 and WCB4 Wireless Charging Bases sold separately.

LED Type:	3W COB + 1W SMD
Lumen Output:	Side; 15-250lm, Top; 100lm
Operating Time:	Side; 3hr, Top; 6hr
Charging Time:	4hr
IP Rating:	IP54
Battery:	3.7V 1.8Ah Li-Poly

B NEW



SMD LED

COB LED

500 LUMENS

Magnetic



B LEDWC04

5W COB & 1W SMD LED Rechargeable Inspection Light Wireless Charging

Fully versatile inspection light with dimming function. Supplied with one strong magnet on the base and two on the back. Front light produces up to 500 lumens dimming all the way down to 15 lumens. The top spotlight acts as a torch at 100 lumens. Operating time is 2.5hr for the main light and up to 10hr on the spotlight. Supplied with Type-C USB cable. Model No's WCB3 and WCB4 Wireless Charging Bases sold separately.

LED Type:	5W COB + 1W SMD
Lumen Output:	Side; 15-500lm, Top; 100lm
Operating Time:	Side; 2.5hr, Top; 10hr
Charging Time:	4.5hr
IP Rating:	IP54
Battery:	3.6V 2.5Ah Li-ion

NEW

C



D



C-D SEE BELOW

Wireless Charging Bases

Wireless charging bases fitted with two strong magnets for attaching to a metal surface. Two recessed locking slots on the back for permanent fixture to non-metallic surface or wall. Charges both Model No's LEDWC03 and LEDWC04 Wireless Rechargeable Inspection Lights. Supplied with mains adaptor and Type-C USB charging cable.



	C	D
Model No:	WCB3	WCB4
Charging Ports:	1	2
Output:	5V⇒1A	5V⇒2A
Input Voltage:	5V⇒1A	5V⇒2A

A & B



Full 180° articulation for easy direction of light.



Top spotlight acts as a torch.



360° Swivel hook for where ferrous surface isn't available.



Strong magnets on base and back for hands-free operation.



A LEDWCBCOMBO1
3W COB & 1W SMD LED Inspection Light & Single Wireless Charging Base
 Refer to individual Model No. for full specification.

Contents: LEDWC03, WCB3



B LEDWCBCOMBO2
5W COB & 1W SMD LED Inspection Light & Single Wireless Charging Base
 Refer to individual Model No. for full specification.

Contents: LEDWC04, WCB3



C LEDWCBCOMBO3
3W COB & 1W SMD LED Inspection Light (x2) & Double Wireless Charging Base
 Refer to individual Model No. for full specification.

Contents: LEDWC03 (x2), WCB4



D LEDWCBCOMBO4
3W & 5W COB LED Inspection Lights & Double Wireless Charging Base
 Refer to individual Model No. for full specification.

Contents: LEDWC03, LEDWC04, WCB4



E LEDWCBCOMBO5
5W COB & 1W SMD LED Inspection Light (x2) & Double Wireless Charging Base
 Refer to individual Model No. for full specification.

Contents: LEDWC04 (x2), WCB4



F CP20VCLKIT1
20V 4Ah SV20 Series Cordless SMD LED 1800lm Worklight Kit
 Refer to individual Model No. on page 1169 for full specification.

Contents: CP20VCL, CP20VBP4 (4Ah), CP20VMC, CP1200CB



G CP20VWLKIT1
20V 4Ah SV20 Series 2-in-1 Cordless/Corded SMD LED 4000lm Worklight Kit
 Refer to individual Model No. on page 1169 for full specification.

Contents: CP20VWL, CP20VBP4 (4Ah), CP20VMC, CP1200CB



A

UP TO
1000
LUMENS

Magnetic



THE
360°

COB LED
SMD LED

A LED1001
Rechargeable Inspection Light

Smooth 90° flex with additional 360° twist function enables the light source to be positioned in any direction. Super bright 8W COB LED provides up to 1000 lumens output with 120° spread of light, illuminating the whole work area. Includes an additional high power 1W SMD LED directional torch. Features a swivel hanging hook and rubber covered magnet on the base, which allow hands-free operation. Two high quality 2.6Ah lithium-ion batteries for longer life. Supplied with Type-C USB cable.

LED Type:	8W COB + 1W SMD
Lumen Output Side(High/Low)/Top:	(1000/500)/100lm
Length:	240mm
Operating Time Side(High/Low)/Top:	(2/4)/16hr
Charging Time:	5hr
IP Rating:	IP54
Battery:	3.7V 2.6Ah Li-ion (x2)
Pack of 12:	LED1001DB

1W SMD LED directional torch.


Hanging hook on reverse.

1000 lumens,
8W COB LED.

On/Off button incorporates
(High/Low)/Top: (2/4)/16hr.

90° Flex with additional
360° twist function.

Rubber covered magnet
on base.

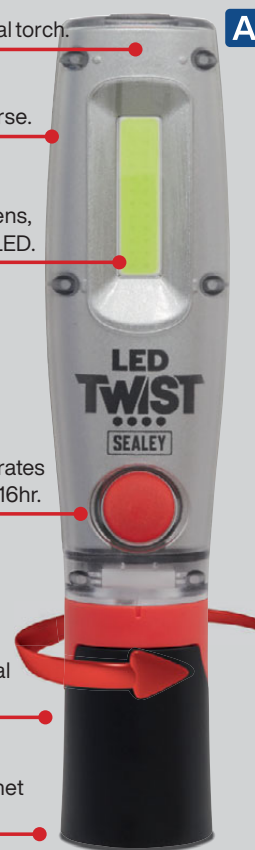

B



Magnetic

300
LUMENS

COB LED
SMD LED



B LED3601COMBO
LED3601 Series - Display Box of 12

For full specification see page 1158.

Model No:	Colour:	Qty:
LED3601	Black	4
LED3601G	Green	4
LED3601R	Red	4

C



COB LED

160
LUMENS

C LED360HTDB
2W COB LED Rechargeable Head Torch
with Auto-Sensor - Display Box of 12

Includes 4 x Green, 4 x Red and 4 x Black models. New design 360° multifunction 2W COB LED rechargeable head torch. Headband can also be used as a wristband. When the band is removed can also be used as a clip light, or as a standalone table light. One button includes five different lighting options. First press is 100% white light, second dims to 40% white light, third is red warning light (1W COB LED) and fourth is red warning flash, which makes it ideal for cycling. Holding the button enables auto-sensor function to switch on/off just by waving hand in front. Adjustable head/wristband and foam brow for added comfort. Supplied with micro USB charging cable.

LED Type:	2W COB
Lumen Output (High/Low):	160/60lm
Operating Time (High/Low):	2.5/4hr
Charging Time:	1.5hr
Battery:	3.7V 0.5Ah Li-Poly

D

500
LUMENS

Magnetic

Music

Wireless




COB LED

D LED50WSDB
10W COB LED Rechargeable Torch with
Wireless Speaker - Display Box of 10

Supplied with built-in high quality wireless speaker which can easily be connected to your smartphone or tablet to play music. Rubber coated housing with recessed hook and integral 90° adjustable stand. Battery charge level indicator on the back. Main light has an on/off power button, when pressed multiple times cycles through two levels of brightness, 500 lumens and 250 lumens with a runtime of 4.5hr/12hr. Light produces a beam distance of up to 50m. IK06 Impact rated to withstand falls of up to 1m. Light and speakers can be used whilst charging. Supplied with micro USB cable.

LED Type:	10W COB
Lumen Output (High/Low):	500/250lm
Operating Time (High/Low):	4.5/12hr
Charging Time:	6hr
Length:	160mm
IP Rating:	IPX4
Battery:	3.7V 3Ah Li-ion

A COB LED



Magnetic

500 LUMENS



A LED50WS

10W COB LED Rechargeable Torch with Wireless Speaker

Supplied with built-in high quality wireless speaker which can easily be connected to your smartphone or tablet to play music. Rubber coated housing with recessed hook and integral 90° adjustable stand. Battery charge level indicator on the back. Main light has an on/off power button when pressed multiple times cycles through two levels of brightness, 500 lumens and 250 lumens with a runtime of 4.5hr/12hr. Light produces a beam distance of up to 50m. IK06 Impact rated to withstand falls of up to 1m. Light can be used whilst charging. Supplied with micro USB cable.

LED Type:	10W COB
Lumen Output (High/Low):	500/250
Operating Time (High/Low):	4.5/12hr
Charging Time:	6hr
Length:	160mm
IP Rating:	IPX4
Battery:	3.7V 3Ah Li-ion

B COB LED

1100 LUMENS



B LED100WS

20W COB LED Rechargeable Floodlight with Wireless Speakers & Power Bank

3-in-1 Function floodlight made of a strong nylon plastic with thermoplastic rubber edges for durability. Features an ultra-bright 20W COB LED light producing up to 1100 lumens with three light settings: High 1100 lumens, Mid 580 lumens, Low 350 lumens (working time: 3, 5 and 15hr respectively). Worklight also includes two good quality wireless speakers which can be easily linked to your tablet or smartphone. Fixed to the rear is a sturdy 180° adjustable stand which can also be used as a carry handle. Has four strong magnets on the back for easy mounting to metal applications such as a tool chest. Built-in power bank with a USB output and LED charge indicator. Micro USB charging lead included.

LED Type:	20W COB
Lumen Output (High/Mid/Low):	1100/580/350lm
Running Time:	3-15hr
Charging Time:	8hr
Speaker Output:	80dB
Battery:	3.7V 8Ah Li-Poly

C NEW

Magnetic

1500 LUMENS

COB LED

SMD LED




C LED18WFL

18W COB & SMD LED Rechargeable Flexible Floodlight

Features adjustable light angle and three light sources. Front 18W COB LED producing 1500 lumens and two adjustable 9W SMD LED side lights producing 600 lumens each. Five light modes with maximum run time of 9hr. Light can be rotated 360°, whilst the side lights can rotate 180° independently for a wider spread of light. Long beam distance of 20m to illuminate a larger area. Other features include four freestanding magnetic feet, large carry handle, emergency power bank function and supplied with screw adaptor to fit Sealey Tripod TRI01, see page 1169. Type-C charging port and 80cm USB cable included.

LED Type:	18W COB + 2 x 9W SMD
Lumen Output (Front/Each Side):	1500/600lm
Charging Time:	9hr
Operating Time (High/Low):	3/6hr
Battery:	3.7V 4.4Ah Li-ion



D NEW

500 LUMENS

SMD LED



D LED1200E

5W SMD LED Rechargeable Emergency Floodlight

Light automatically comes on when power source is switched off. Maximum run time of 6hr to provide light for a prolonged period during power failure. 5W SMD LED dual mode setting producing up to 500 lumens which can illuminate a large room/area. Floodlight has a built-in 0.85m charging cable, battery and stand. Featuring charging level indicator.

Power:	5W
LED Type:	SMD
Lumen Output:	500lm
Charging Time:	20hr
Operating Time (High/Low):	3/6hr
IP Rating:	IP20
Battery:	3.7V 4Ah Li-ion



COB LED

1900 LUMENS

B



Magnetic

1000 LUMENS

COB LED



A LED184

20W COB LED Rechargeable Portable Floodlight with Power Bank

Die-cast aluminium housing with integral 180° adjustable stand. 20W COB LED technology allows ultra-bright illumination. Power switch has three brightness settings (low, medium and high) allowing it to produce up to 1900 lumens. Features battery level indicator and a 5V=1A USB output for charging electronic devices. Supplied with micro USB charging cable.

LED Type:	20W COB
Lumen Output (High/Low):	1900/650lm
Operating Time (High/Low):	1.6/4.5hr
Charging Time:	9hr
IP Rating:	IPX4
Battery:	3.7V 2Ah Li-ion (x3)

A



USB Output for charging electronic devices.

B LED1000PB

10W COB LED Rechargeable Pocket Floodlight with Power Bank

Compact, lightweight design with a massive 1000 lumens output. Made with a tough ABS plastic housing with flip-out magnetic bracket that hides a small carabiner, which can be used when no ferrous surface is available. Includes USB 5V=1A output for secondary use as a power bank. Magnetic bracket can be angled at a range of 120° making it simple and easy to direct up to 1000 lumens of light. Three light output settings; full 1000 lumens, half 500 lumens and flashing. Features LED battery level indicator. Fitted with a high quality 3.7V 4.5Ah lithium-ion battery. Supplied with micro USB cable.

LED Type:	10W COB
Lumen Output:	1000lm
Operating Time:	4hr
Charging Time:	3.5hr
IP Rating:	IPX4
Battery:	3.7V 4.5Ah Li-ion

C

COB LED

250 LUMENS

Magnetic



C LED100C

3W COB LED Worklight with Clamp

3W COB LED that produces up to 250 lumens. Made from tough ABS plastic with a moulded grip and a soft finish. Clamp opens up to 3 inches. Light can be separated from the grip and used as a small handheld torch or mounted to any magnetic surface. Features 360° rotating ball joint to allow for greater coverage. Requires 3 x AA batteries (not included).

LED Type:	3W COB
Lumen Output:	250lm
Operating Time:	5hr
Battery:	3 x AA (not included)

B



D



700 LUMENS

E



700 LUMENS

F



1400 LUMENS

Magnetic

COB LED

D-F SEE BELOW

360° COB LED Rechargeable Pocket Floodlights with Magnet

Incredibly tough aluminium housing with sturdy handle which can rotate through 360°. Virtually indestructible and one of the most durable floodlights available. Also fitted with a strong magnet, making it simple and easy to direct light. Three light output settings. Features three LED battery level indicator. Fitted with a high quality 3.7V 2.6Ah or 5.2Ah lithium-ion battery. Supplied with USB Type-C Cable.

LED Type:	7W COB
Lumen Output (High/Mid/Low):	700/350/100lm
Operating Time (High/Mid/Low):	2/4/10hr
Charging Time:	4hr
Length:	95mm
IP Rating:	IP65
Battery:	3.7V 2.6Ah Li-ion
Model No:	Colour:

D LED700P	Green
E LED700PR	Red

LED Type:	14W COB
Lumen Output (High/Mid/Low):	1400/700/350lm
Operating Time (High/Mid/Low):	2/5/10hr
Charging Time:	4hr
Length:	125mm
IP Rating:	IP65
Battery:	3.7V 5.2Ah Li-ion
Model No:	Colour:

F LED1400P	Green
-------------------	-------



A-B SEE BELOW

COB LED Rechargeable Portable Floodlights - Fold Flat

Rechargeable worklights which double up as a 5V 1A power bank for charging USB devices such as mobile phones and tablets. Four settings, high/low/SOS/flash mode. Folds flat for easy storage. Suitable for indoor and outdoor use (IP67 rated) suitable for use in wet or dusty conditions. Supplied with 1m micro USB charging cable.

	A	B
Model No:	LEDFL10W	LEDFL20W
LED Type:	10W COB	20W COB
Lumen Output (High/Low):	750/375lm	1600/800lm
Operating Time (High/Low):	2.5/5hr	2/4hr
Charging Time:	4hr	6hr
Collapsed Size:	215 x 180 x 38mm	240 x 230 x 38mm
IP Rating:	IP67	IP67
Battery:	3.7V 2.2Ah Li-ion	3.7V 4.4Ah Li-ion




C LED068

20W COB LED

Rechargeable Floodlight - Colour Matching CRI 96

Rechargeable professional floodlight with super bright COB LED which gives an even and constant spread of light. Five colour temperature options, 2700K, 3500K, 4500K, 5500K and 6500K. Produces a light with a CRI (Colour Rendering Index) of 96, which gives a daylight effect. Ideal for detecting swirls and differences in paint colour when touching up areas of bodywork. Three settings allow for 25, 50 or 100% brightness to suit task. Features a 180° adjustable stand and a five LED battery level indicator. Supplied with charging lead.

LED Type:	20W COB
Lumen Output (High/Low):	2000/500lm
Operating Time (High/Low):	2/8hr
Charging Time:	3.5hr
CRI Rating:	96
IP Rating	IP65
Battery:	11.1V 4.4Ah Li-ion

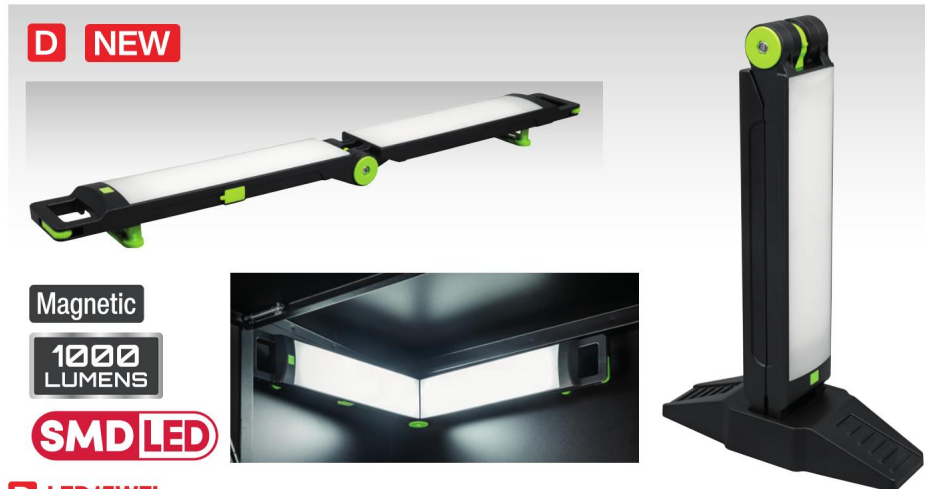

D LED15WFL

10W SMD LED 3-in-1 Folding Floodlight

3-in-1 Design makes this light perfect for almost any situation and workplace. Folding floodlight can either be placed into the stand folded to illuminate both sides of a room or folded up to create one long floodlight. Supplied with a strong base to keep the light upright and in position. Fold out magnets are situated at either end to be used as an under-bonnet light. Features hooks at either end and one centrally so you can hang it almost anywhere. 1000 Lumen light with three different light settings. Supplied with Type-C USB charging cable.

LED Type:	10W SMD
LED Quantity:	116
Lumen Output:	1000lm
Charging Time:	5-6hr
Operating Time:	2hr both sides, 4hr one side
IP Rating:	IP20
Battery:	3.7V 4Ah Li-ion



E LED109C

10W SMD LED Rechargeable Portable Floodlight

Portable floodlight with adjustable head, housed within a stable steel frame. Features 10W SMD LED produces a super bright beam, giving a full 120° spread of light. Weatherproof design with an on/off rocker switch and two light settings. Supplied with mains charger and 12V in-car charger. Suitable for lighting workshops, garages and other environments where no mains supply is available.

LED Type:	10W SMD
Lumen Output (High/Low):	1000/400lm
Operating Time (High/Low):	3.5/8hr
Charging Time:	5hr
Battery:	7.4V 4Ah Li-ion

A NEW



COB LED

1500 LUMENS



A LED1500PB

15W COB LED Portable Floodlight and Power Bank

Five modes of light ranging from 150 to 1500 lumens. 180° Adjustable stand for positioning of light. Five LED battery level indicators and low power warning. Supplied with 1m Type-C USB charging cable. Power bank output 5V 2A.

LED Type:	15W COB
Lumen Output:	Mode 1 - 150lm, Mode 2 - 375lm, Mode 3 - 750lm, Mode 4 - 1125lm, Mode 5 - 1500lm
Operating Time:	Mode 1 - 25hr, Mode 2 - 12hr, Mode 3 - 6hr, Mode 4 - 4 hr, Mode 5 - 3hr
Charging Time:	3.5hr
USB Output:	5V=2A
IP Rating:	IP65
Battery:	3.7V 5Ah Li-ion

B NEW



COB LED

3000 LUMENS



B LED3000PB

30W COB LED Portable Floodlight and Power Bank

Five modes of light ranging from 300 to 3000 lumens. 180° Adjustable stand for positioning of light. Five LED battery level indicators and low power warning. Supplied with 1m Type-C USB charging cable. Power bank output 5V 2A.

LED Type:	30W COB
Lumen Output:	Mode 1 - 300lm, Mode 2 - 750lm, Mode 3 - 1500lm, Mode 4 - 2250lm, Mode 5 - 3000lm
Operating Time:	Mode 1 - 25hr, Mode 2 - 12hr, Mode 3 - 6hr, Mode 4 - 4hr, Mode 5 - 3hr
Charging Time:	5.5hr
USB Output:	5V=2A
IP Rating:	IP65
Battery:	7.4V 5Ah Li-ion

C NEW



1500 LUMENS



COB LED

C LED1500PBKIT

15W LED Portable Floodlight & Telescopic Tripod

Five modes of light ranging from 150 to 1500 lumens. 180° Adjustable stand for positioning of light. Five LED battery level indicators and low power warning. Supplied with 1m Type-C USB charging cable. Power bank output 5V 2A. Telescopic tripod which extends to a maximum height of 1.5m and minimum height of 0.66m. Supplied with top mounting M6 female thread with M6x35mm male clamping knob.

LED Type:	15W COB
Lumen Output:	Mode 1 - 150lm, Mode 2 - 375lm, Mode 3 - 750lm, Mode 4 - 1125lm, Mode 5 - 1500lm
Operating Time:	Mode 1 - 25hr, Mode 2 - 12hr, Mode 3 - 6hr, Mode 4 - 4 hr, Mode 5 - 3hr
Charging Time:	3.5hr
USB Output:	5V=2A
IP Rating:	IP65
Battery:	3.7V 5Ah Li-ion
Tripod:	TRI01

D NEW



3000 LUMENS



COB LED

D LED3000PBKIT

30W LED Portable Floodlight & Telescopic Tripod

Five modes of light ranging from 300 to 3000 lumens. 180° Adjustable stand for positioning of light. Five LED battery level indicators and low power warning. Supplied with 1m Type-C USB charging cable. Power bank output 5V 2A. Telescopic tripod which extends to a maximum height of 1.5m and minimum height of 0.66m. Supplied with top mounting M6 female thread with M6x35mm male clamping knob.

LED Type:	30W COB
Lumen Output:	Mode 1 - 300lm, Mode 2 - 750lm, Mode 3 - 1500lm, Mode 4 - 2250lm, Mode 5 - 3000lm
Operating Time:	Mode 1 - 25hr, Mode 2 - 12hr, Mode 3 - 6hr, Mode 4 - 4hr, Mode 5 - 3hr
Charging Time:	5.5hr
USB Output:	5V=2A
IP Rating:	IP65
Battery:	7.4V 5Ah Li-ion
Tripod:	TRI01



A
NEW

TRI01 with
Model No. CP20VWL

A TRI01
1.5m Telescopic Tripod

Ideal for trades of all kinds. Easy to transport. Top mounting M6 female thread supplied with M6x35mm male clamping knob. Suitable with any product that can be mounted with M6 male thread including all worklights on this page and LED18WFL, see page 1165. Features cord hanger for the easy storage of a power cord when using mains powered lights.

Min./Max. Height: 0.66m/1.5m



B **NEW**

SMD LED

1800 LUMENS

SV20
SERIES

B-C SEE RIGHT
20V Cordless 15W SMD LED Worklight

Cordless clip worklight useful in any workspace. Robust design with integrated carry handle and 360° movement. Ultra-bright illumination with 15W SMD LED lights producing 1800 lumens. Simple on/off switch with four levels of brightness. IP20 and IK07 rated.

LED Type:	15W SMD
Lumen Output:	1800lm Max. with four levels of brightness (25%, 50%, 75% and 100%)
Operating Time:	2Ah - 2.5hr, 4Ah - 5hr, 6Ah - 7.5hr
IP Rating:	IP20
Body Only Weight:	1.12kg



C **NEW**

+ BATTERY (4Ah)
+ BATTERY CHARGER
+ STORAGE BAG



Model No:	Type:	Contents:
B CP20VCL	Body Only	Worklight
C CP20VCLKIT1	Kit	CP20VCL - Worklight CP20VBP4 - 4Ah Battery CP20VMC - Battery Charger CP1200CB - Canvas Storage Bag



D **NEW**

SMD LED

UP TO 4000 LUMENS

SV20
SERIES

D-E SEE RIGHT
20V Cordless 45W SMD LED Worklight

Cordless worklight useful in any workspace with integrated AC and DC power. 360° Movement with ultra-bright illumination. 45W SMD LED Lights producing up to 4000 lumens. Robust design with integrated carry handle and side lights to illuminate the darkest spaces. Simple on/off switch with two levels of brightness depending on power supply. Powered by either 20V lithium-ion battery (not included) or 230V 50Hz 1.5m mains cable with British standard plug.

LED Type:	45W SMD
Lumen Output:	2700lm using 20V battery pack (not supplied), 4000lm using mains cable
Power:	25W using battery pack, 45W using mains cable
IP Rating:	IP20 at lamp body, IK07
Body Only Weight:	2.12kg



E **NEW**

+ BATTERY (4Ah)
+ BATTERY CHARGER
+ STORAGE BAG



Model No:	Type:	Contents:
D CP20VWL	Body Only	Worklight
E CP20VWLKIT1	Kit	CP20VWL - Worklight CP20VBP4 - 4Ah Battery CP20VMC - Battery Charger CP1200CB - Canvas Storage Bag



A **SMD LED**
2500 LUMENS
24W
16A 110V

B **SMD LED**
5000 LUMENS
48W
16A 110V



C **SMD LED**
2500 LUMENS
24W
13A 230V

D **SMD LED**
5000 LUMENS
48W
13A 230V

A-D SEE BELOW
SMD LED Site Lights

Heavy-duty robust design with integral carry handle and 180° stand for positioning of light and substantial stability. SMD LED Technology site lights for ultra-bright illumination. Simple on/off weatherproof switch on reverse of lights. Cable strap to keep cable tidy when not in use. Cable gland fitted to entry of the light to provide good protection of the cable.

	A	B	C	D
Model No:	LED24110	LED48110	LED24230	LED48230
Power:	24W	48W	24W	48W
LED Type:	SMD	SMD	SMD	SMD
Lumen Output:	2500lm	5000lm	2500lm	5000lm
Colour Temperature:	5700K	5700K	5700K	5700K
IP Rating:	IP54	IP54	IP65	IP54
Supply/Plug Type:	110V/Yellow - 16A-2P+E	110V/Yellow - 16A-2P+E	230V/3-Pin	230V/3-Pin
Power Supply Cable Length:	5m	5m	5m	5m



E NEW **SMD LED**
4200 LUMENS

E LED30WDL
30W SMD LED Loading Bay Floodlight

4200 Lumen SMD LED light on a 1m foldable single arm bracket with 30° beam angle. Light is encased in anti-corrosion stainless steel cage. Comes with integral AC-DC transformer.

LED Type:	30W SMD
Lumen Output:	4200lm
IP Rating:	IP65
Supply/Plug Type:	230V/3-Pin
Power Supply Cable Length:	1.5m

A-C

230V

SMD LED



20W

50W

100W

**2 YEAR
GUARANTEE***

A-C SEE BELOW

SMD LED Extra-Slim Floodlights

Mounted in die-cast powder coated aluminium extra-slim housing with wall bracket. SMD LED technology allows ultra-bright illumination whilst still keeping costs lower than traditional halogen tubes. Even spread of light across a 110° angle. Prewired with 0.75m rubberised power cable.

	A	B	C
Model No:	LED112	LED113	LED115
Power:	20W	50W	100W
LED Type:	SMD	SMD	SMD
Lumen Output:	1900lm	5200lm	10,000lm
Colour Temperature:	6500K	6500K	6500K
IP Rating:	IP65	IP65	IP65
Supply/Plug Type:	230V/Bare Wire	230V/Bare Wire	230V/Bare Wire
Power Supply Cable Length:	0.75m	0.75m	0.75m

D-F

230V

SMD LED



20W

50W

100W

**2 YEAR
GUARANTEE***

D-F SEE BELOW

SMD LED Extra-Slim Floodlights with PIR Sensor

Mounted in die-cast powder coated aluminium extra-slim housing with wall bracket. SMD LED technology allows ultra-bright illumination whilst still keeping costs lower than traditional halogen tubes. Even spread of light across a 110° angle. Features a PIR motion detector. Prewired with 0.75m rubberised power cable.

	D	E	F
Model No:	LED112PIR	LED113PIR	LED115PIR
Power:	20W	50W	100W
LED Type:	SMD	SMD	SMD
Lumen Output:	1900lm	5200lm	10,000lm
Colour Temperature:	6500K	6500k	6500k
IP Rating:	IP65	IP65	IP65
Supply/Plug Type:	230V/Bare Wire	230V/Bare Wire	230V/Bare Wire
Power Supply Cable Length:	0.75m	0.75m	0.75m

G NEW



SMD LED

**1600
LUMENS**

Solar Powered



G LED16S

16W SMD LED Extra-Slim Solar Floodlight

Producing 1600 lumens and featuring both daylight (CDS) and motion (PIR) sensors to switch on automatically. Motion sensor can detect up to 5m. Mounted in die-cast powder coated aluminium extra-slim housing with wall bracket. Battery capable of a run time of 10 hours and has a 30 second timer upon sensing motion.

LED Type:	16W SMD
Lumen Output:	1600lm
Operating Time:	10 hours, 30 seconds once motion sensor activated
Supply:	5V DC
IP Rating:	IP65
PIR Motion Sensor:	✓

I



SMD LED

**150
LUMENS**



Magnetic

I TBL450

1.5W SMD LED Rechargeable Magnetic Toolbox Light

Robust aluminium housing incorporating 1.5W SMD LEDs to illuminate the trays in a toolbox. With a width of 450mm the light is fitted with two sliding magnetic brackets which can rotate 180° to direct the light as required, whilst also giving the flexibility to attach the light to any ferrous metal avoiding badges and logos. Features two light settings with an operating time of up to 12hr. Powered by a rechargeable 3.7V 2.2Ah lithium-ion battery and includes an LED charging indicator. Supplied with a 1m USB charging cable.

LED Type:	1.5W SMD
Lumen Output (High/Low):	150/100lm
Operating Time (High/Low):	6/12hr
Charging Time:	3hr
Battery:	3.7V 2.2Ah Li-ion
Dimensions (W x D x H):	450 x 50 x 30mm

H

SMD LED

**420
LUMENS**



H ML9230V

5W SMD LED Lead Light

High output illumination with even spread of light. SMD LEDs lower power consumption, saving on energy costs, and have a high shock resistance and life span. Supplied with 5m cable.

LED Type:	5W SMD
Lumen Output:	420lm
Colour Temperature:	6500K
Overall Length:	400mm
IP Rating:	IP54
Power Supply Cable Length:	5m
Plug Type:	3-Pin
Supply:	230V



A LEDSTR03

3pc SMD LED Strip Lighting

Linkable LED strip lights with PIR and CDS sensor. The sensor only works in dark (illuminance $\leq 10-20$ LUX). The PIR and CDS sensor can be set to two modes, 30 seconds and 1 minute before turning off. This allows you to leave the light on when not in use and it will turn off after the set period when no movement is detected. Each strip features 6 SMD LEDs and can be linked to up to five strips. Each pack includes two corner extensions, one cover for the end of the strip and six metal clips with option of using the included screws or adhesive strips to attach to almost any surface. USB powered or can be used with the battery case supplied (4 x AAA batteries not included) which can also be mounted using the bracket supplied, any 5V=1A/2A power bank or a 5V=1A/2A USB plug adaptor.

SMD LED **150 LUMENS** **4 x AAA Batteries**

LED Type:	0.6W x 3 SMD
Lumen Output:	150lm
Operating Time:	4hr
Length (L x W x D):	306 x 8.44 x 6.80mm Per Strip
Battery:	4 x AAA (not included)



B GL93

1W COB LED Auto Light with PIR Sensor

Manufactured from a lightweight composite material. Two 0.5W bright white COB LEDs. Easily positioned on a 90° axis. Simple on/off switch or automatic setting, which switches the LEDs on when the PIR sensor detects movement. Suitable for garden sheds, garages or around the home. Requires 3 x AA batteries (not included).

LED Type:	2 x 0.5W COB
Lumen Output:	80lm
Battery:	3 x AA (not included)



C LED3WB

3W SMD LED Rechargeable Bulb

Ideal for camping or emergency situations. Operates 14 SMD LEDs that feature five selectable light settings. 3.7V 1.2Ah Lithium-ion rechargeable battery for up to 3 hours operating time. Built-in hanging hook for hands-free applications. Micro USB cable supplied.

LED Type/Power:	14 x 0.2W SMD/3W
Lumen Output (High/Med/Low):	170/80/40lm
Charging Time:	4/5hr
Functions:	High/Med/Low/Blink
Operating Time:	High - 3hr
Battery:	3.7V 1.2Ah Li-ion



D-E SEE BELOW

360° 60W SMD LED Standing Tube Floodlights

360° floodlights illuminate the whole area whilst working. 60W SMD LED produces 6600 lumens with foldable tripod for easy storage. Model No. LED60230V suitable for workshop and garage use, Model No. LED60110V suitable for building site use.

	D	E
Model No:	LED60230V	LED60110V
LED Type:	60W SMD	60W SMD
Lumen Output:	6600lm	6600lm
IP Rating:	IP54	IP54
Power:	60W	60W
Colour Temperature:	4000K	4000K
Supply:	230V	110V
Plug Type:	3-Pin	Yellow - 16A-2P+E
Power Supply Cable Length:	3m	3m
Height:	1500mm	1500mm

A



1000 LUMENS **SMD LED**

A LED138

10W SMD LED Under-Bonnet Cordless Rechargeable Light

Robust aluminium design with built-in spring loaded telescopic mounting brackets. Both brackets can rotate 360° individually, making it easy to direct the light where required. Two light settings; full - 1000 lumens, half - 500 lumens. Includes battery level indicator, mains charger and micro USB cable.

LED Type:	10W SMD
Lumen Output (High/Low):	1000/500lm
Minimum/Maximum Width:	1200/1800mm
Operating Time (High/Low):	3/6hr
Charging Time:	4.5hr
Battery:	3.7V 4.4Ah Li-ion



B LED139

13W SMD LED Rechargeable Under-Bonnet Light

1200 Lumens with three brightness settings. 180° Swivel handle for adjustable lighting angle. Each end has a 360° swivel/hanging hook and a magnet. 1.8m Type-C USB charging cable. Includes LED charge indicator. Max. 4hr run time.

LED Type:	13W SMD
Lumen Output:	1200lm
Operating Time(High/Med/Low):	1/2/4hr
Charging Time:	4-6hr
Battery:	3.7V 4.4Ah Li-ion

B NEW Magnetic

1200 LUMENS **SMD LED**



C ULR01COMBO1

LED700PR Under-Bonnet Light Rail Combo

Versatile aluminium and steel construction allows easy fixing of magnetic lights. Nylon coated TPE arm ends protect the edges of the bonnet. Magnetic bases rotate 360° horizontally to obtain required lighting angle. Centre buckle allows extension of the rail, and then clips back down to fix the length. Easy push-button release allows the bases to move freely along the section of rail.

Contents:	ULR01 - Under-Bonnet Light Rail, LED700PR - 360° 7W COB LED Rechargeable Pocket Floodlight with Magnet (x2)
Collapsed Size (W x D x H):	850 x 110 x 180mm
Extended Size (W x D x H):	2100 x 110 x 180mm

C NEW



700 LUMENS **COB LED**

FLOODLIGHTS

For full details, see page 1166 for Model No. LED700PR which fits ULR01.





A LED040
12 SMD & 6 SMD LED Rotating Hazard Warning Emergency Light

Rotating warning light is ideal to keep in the car for a variety of roadside emergency applications and hazard awareness. Durable, waterproof (IPX5) and extremely heavy-duty design. Features nine different warning functions with 12 ultra-bright amber coloured SMD LEDs and three white SMDs for use as a torch producing 150 lumens. Visible 360° at 500m distance. Includes three magnets for adhering to any ferrous material and hanging hook for hands-free operation. Powered by 3 x AAA batteries (not included).

LED Type:	12 SMD + 6 SMD
Dimensions:	130 x 120 x 45mm
Functions:	White 6 SMD Light on, Amber Double Flash Quick, Double Flash Slow, Single Flash, Rotate, Alternate Flash, SOS, All Amber Light On, 2 x Amber On
Battery:	3 x AAA (not included)

B-E SEE BELOW
12/24V SMD LED Warning Beacons

Fully approved for highway use to EN 65. Heavy-duty ABS bases. Quick release UV stabilised domes will not fade when exposed to sunlight. Features 45 LEDs for an increased output of light. Dual voltage (12/24V) with 3-function control allowing different LED configurations depending on operation (Switch 1: Rotating flash; flash rotates mimicking a rotary beacon, Switch 2: Six rapid flashes followed by a break, Switch 3: Two flashes followed by a break). CE Approved and E-Marked.



B WB951LED
12V/24V SMD LED Warning Beacon with 12mm Bolt Fixing

Single point mounting beacon suitable for direct mounting to vehicle roof using a 12mm bolt.



C WB952LED
12V/24V SMD LED Warning Beacon with 3 Bolt Fixing

Direct mounting beacon, pre-drilled with 3 x 6.5mm holes.



D WB954LED
12V/24V SMD LED Warning Beacon with Magnetic Base

Fitted with six powerful magnets, strong enough to cope with normal road speeds. Supplied with 3m coiled flex and universal vehicle accessory socket plug.



E WB955LED
12V/24V SMD LED Warning Beacon with Flexible Spigot Base

Flexible spigot suitable for mounting on agricultural vehicles where standard beacons may be broken.



F MLB80MB
12/24V 120W SMD LED Mini Light Bar - Magnetic Base

Extremely bright 120W amber SMD LED high intensity mini light bar fitted with magnets on the base. 10 Modules fitted with eight LEDs, creating a 360° light. Fitted with a 3m cable and 12V vehicle accessory socket. Plug includes two switches, on/off and a momentary switch, giving you the option of ten different flash patterns. Built-in memory recalls last pattern selected. ECE R65 and R10 Approved for highway use. CE Approved and E-Marked. IP56 rated.

Supply:	12-24V DC
Temperature Range:	-30°C to +50°C
Dimensions (W x D x H):	279 x 165 x 61mm
Weight:	1.2kg




G MLB80SB
12/24V 120W SMD LED Mini Light Bar - Single Bolt Fixing

Extremely bright 120W amber SMD LED high intensity mini light bar fitted with a 10mm single bolt fixing. 10 Modules fitted with eight LEDs, creating a 360° light. Built-in ten option flash pattern that has a built-in memory which recalls the last pattern selected. ECE R65 and R10 Approved for highway use. CE Approved and E-Marked. IP56 rated.

Supply:	12-24V DC
Temperature Range:	-30°C to +50°C
Dimensions (W x D x H):	279 x 165 x 61mm
Weight:	1.0kg

A NEW



12V/24V

SMD LED

A WB951LEDG
12V/24V SMD LED Warning Beacon with 12mm Bolt Fixing

Green colour beacon for use on plant vehicles to indicate that a seatbelt is being worn. Single-point mounting beacon suitable for direct mounting to vehicle roof using 12mm bolt. Fitted with 36 x 1W high power SMD LEDs. 120 Flash per minute pattern. Fully meets ECE R10 regulations. IP66 Rated.

B NEW



12V/24V

SMD LED

B WB951LEDR
12V/24V SMD LED Warning Beacon with 12mm Bolt Fixing

Red colour beacon to be used in recoveries on normal and smart motorways. Single-point mounting beacon suitable for direct mounting to vehicle roof using 12mm bolt. Fitted with 12 x 3W high power SMD LEDs. 120 Flash per minute pattern. Fully meets ECE R65 and ECE R10 regulations. IP66 Rated.

C NEW



12V/24V

SMD LED

C WB952LEDR
12V/24V SMD LED Warning Beacon with 3 x 6.5mm Bolt Fixing

Red colour beacon to be used in recoveries on normal and smart motorways. 3-Point mounting beacon suitable for direct mounting to vehicle roof using 3 x 6.5mm bolts. Fitted with 12 x 3W high power SMD LEDs. 120 Flash per minute pattern. Fully meets ECE R65 and ECE R10 regulations. IP66 Rated.

D

NEW

Magnetic



12V/24V

SMD LED

D WB954LEDR
12V/24V SMD LED Warning Beacon with Magnetic Fixing

Red colour beacon to be used in recoveries on normal and smart motorways. Fitted with a powerful magnet, strong enough to cope with normal road speeds and holes for optional mounting via screws. Supplied with 3m coiled flex and universal vehicle accessory socket plug. Fitted with 12 x 3W high power SMD LEDs. 120 Flash per minute pattern. Fully meets ECE R65 and ECE R10 regulations. IP66 Rated.

E NEW



12V/24V

SMD LED

E WB955LEDG
12V/24V SMD LED Warning Beacon with Flexible Spigot Fixing

Green colour beacon for use on plant vehicles to indicate that a seatbelt is being worn. Flexible spigot beacon suitable for mounting on spigot brackets, Sealey Model No's RB95B1 or RB95B2. Fitted with 36 x 1W high power SMD LEDs. 120 Flash per minute pattern. Fully meets ECE R10 regulations. IP66 Rated.

F

G



F-G SEE BELOW
2 Bolt Fixing Beacon Brackets for RB955LED & WB955LED

Mounting bracket for DIN spigot beacons with prewired socket. Constructed of tough and lightweight materials for extended life. Water resistant cap.




Model No:	Type:
F RB95B1	Straight Mount Fixing - Ø24mm DIN Spigot
G RB95B2	90° Vertical Fixing - Ø24mm DIN Spigot

	A	B	C	D	E
Model No:	WB951LEDG	WB951LEDR	WB952LEDR	WB954LEDR	WB955LEDG
LED Type:	36 x 1W SMD	12 x 3W SMD	12 x 3W SMD	12 x 3W SMD	36 x 1W SMD
Working Temperature Range:	-30°C to +50°C	-30°C to +50°C	-30°C to +50°C	-30°C to +50°C	-30°C to +50°C
Wattage:	36W	36W	36W	36W	36W
Voltage:	12/24V	12/24V	12/24V	12/24V	12/24V
IP Rating:	IP66	IP66	IP66	IP66	IP66
Fixing:	Single 12mm Bolt	Single 12mm Bolt	3 x 6.5mm Bolts	Magnetic	Flexible Spigot

A-G SEE BELOW

LED Worklights

Operating voltage of 10-30V DC. Waterproof rating of IP68. ECE R10 Certified and E-Marked. Suitable replacement for traditional halogen worklights. Powder coated die-cast aluminium housing. Adjustable grade 201 shock-resistant stainless steel bracket.


<p>A</p>  <p>SMD LED</p> <p>960 LUMENS</p>	<p>B</p>  <p>SMD LED</p> <p>1200 LUMENS</p>	<p>C</p>  <p>SMD LED</p> <p>2160 LUMENS</p>																								
<p>A LED1R 12W SMD LED Mini Round Worklight with Mounting Bracket 4 x 3W Epistar™ high power LEDs. Produces up to 960 lumens output.</p> <table border="1"> <tr><td>LED Type:</td><td>4 x 3W SMD</td></tr> <tr><td>Supply:</td><td>10-30V DC</td></tr> <tr><td>Lumen Output:</td><td>960lm</td></tr> <tr><td>Size:</td><td>Ø80mm</td></tr> </table>	LED Type:	4 x 3W SMD	Supply:	10-30V DC	Lumen Output:	960lm	Size:	Ø80mm	<p>B LED2S 15W SMD LED Mini Square Worklight with Mounting Bracket 5 x 3W Epistar™ high power LEDs. Produces up to 1200 lumens output.</p> <table border="1"> <tr><td>LED Type:</td><td>5 x 3W SMD</td></tr> <tr><td>Supply:</td><td>10-30V DC</td></tr> <tr><td>Lumen Output:</td><td>1200lm</td></tr> <tr><td>Size (W x H):</td><td>83 x 83mm</td></tr> </table>	LED Type:	5 x 3W SMD	Supply:	10-30V DC	Lumen Output:	1200lm	Size (W x H):	83 x 83mm	<p>C LED3R 27W SMD LED Round Worklight with Mounting Bracket 9 x 3W Epistar™ high power LEDs. Produces up to 2160 lumens output.</p> <table border="1"> <tr><td>LED Type:</td><td>9 x 3W SMD</td></tr> <tr><td>Supply:</td><td>10-30V DC</td></tr> <tr><td>Lumen Output:</td><td>2160lm</td></tr> <tr><td>Size:</td><td>Ø115mm</td></tr> </table>	LED Type:	9 x 3W SMD	Supply:	10-30V DC	Lumen Output:	2160lm	Size:	Ø115mm
LED Type:	4 x 3W SMD																									
Supply:	10-30V DC																									
Lumen Output:	960lm																									
Size:	Ø80mm																									
LED Type:	5 x 3W SMD																									
Supply:	10-30V DC																									
Lumen Output:	1200lm																									
Size (W x H):	83 x 83mm																									
LED Type:	9 x 3W SMD																									
Supply:	10-30V DC																									
Lumen Output:	2160lm																									
Size:	Ø115mm																									



D LED3RM SMD LED
27W SMD LED Round Worklight with Magnetic Base
 9 x 3W Epistar™ high power LEDs. Produces up to 2160 lumens output. Waterproof rating of IP68. ECE R10 Certified and E-Marked. Suitable replacement for traditional halogen worklights. Powder coated die-cast aluminium housing. Adjustable grade 304 shock-resistant stainless steel bracket. Supplied with a magnetic base, coiled cable and vehicle accessory socket plug.

LED Type:	9 x 3W SMD
Supply:	10-30V DC
Lumen Output:	2160lm
Size:	Ø115mm

<p>E</p>  <p>SMD LED</p> <p>2160 LUMENS</p>	<p>F</p>  <p>SMD LED</p> <p>3360 LUMENS</p>	<p>G</p>  <p>SMD LED</p> <p>3840 LUMENS</p>																								
<p>E LED3S 27W SMD LED Square Worklight with Mounting Bracket 9 x 3W Epistar™ high power LEDs. Produces up to 2160 lumens output.</p> <table border="1"> <tr><td>LED Type:</td><td>9 x 3W SMD</td></tr> <tr><td>Supply:</td><td>10-30V DC</td></tr> <tr><td>Lumen Output:</td><td>2160lm</td></tr> <tr><td>Size (W x H):</td><td>108 x 108mm</td></tr> </table>	LED Type:	9 x 3W SMD	Supply:	10-30V DC	Lumen Output:	2160lm	Size (W x H):	108 x 108mm	<p>F LED4R 42W SMD LED Round Worklight with Mounting Bracket 14 x 3W Epistar™ high power LEDs. Produces up to 3360 lumens output.</p> <table border="1"> <tr><td>LED Type:</td><td>14 x 3W SMD</td></tr> <tr><td>Supply:</td><td>10-30V DC</td></tr> <tr><td>Lumen Output:</td><td>3360lm</td></tr> <tr><td>Size:</td><td>Ø115mm</td></tr> </table>	LED Type:	14 x 3W SMD	Supply:	10-30V DC	Lumen Output:	3360lm	Size:	Ø115mm	<p>G LED5S 48W SMD LED Square Worklight with Mounting Bracket 16 x 3W Epistar™ high power LEDs. Produces up to 3840 lumens output.</p> <table border="1"> <tr><td>LED Type:</td><td>16 x 3W SMD</td></tr> <tr><td>Supply:</td><td>10-30V DC</td></tr> <tr><td>Lumen Output:</td><td>3840lm</td></tr> <tr><td>Size (W x H):</td><td>108 x 108mm</td></tr> </table>	LED Type:	16 x 3W SMD	Supply:	10-30V DC	Lumen Output:	3840lm	Size (W x H):	108 x 108mm
LED Type:	9 x 3W SMD																									
Supply:	10-30V DC																									
Lumen Output:	2160lm																									
Size (W x H):	108 x 108mm																									
LED Type:	14 x 3W SMD																									
Supply:	10-30V DC																									
Lumen Output:	3360lm																									
Size:	Ø115mm																									
LED Type:	16 x 3W SMD																									
Supply:	10-30V DC																									
Lumen Output:	3840lm																									
Size (W x H):	108 x 108mm																									

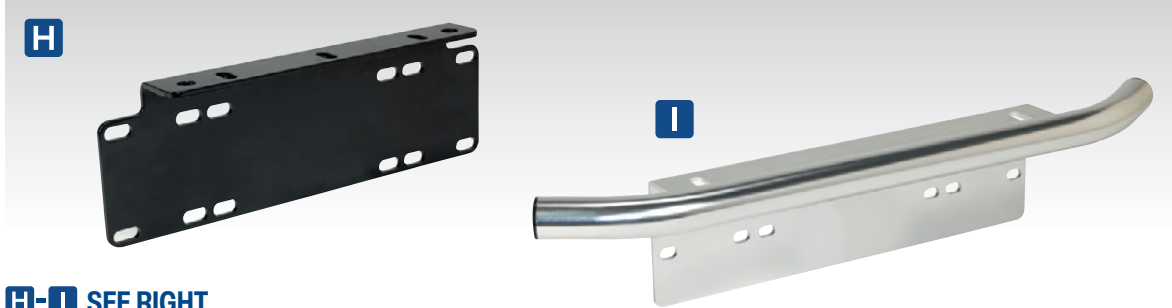

H-I SEE RIGHT

Universal Light Mounting Brackets - Numberplate Fitting

Simple, lightweight solution to fitting driving lamps or LED light bars to the front of a vehicle. Manufactured from lightweight powder coated aluminium. Enables lights to be fitted above or below the numberplate. Ensure that the bracket is securely attached to the vehicle and is capable of supporting the lamps. Make sure the numberplate is clearly visible and not obscured by the lamps or fittings.

Model No:	Size (H x W x D):
H DLB01	125 x 365 x 55mm
I DLB02	120 x 590 x 90mm





230V

A SPB160W

31200mAh Lithium AC Power Pack 160W

Powered by lithium-ion technology. Easily fits in a glove box or backpack and it benefits from being a compact, 1.5kg leisure unit which provides multiple high amperage outputs. This unit can also supply multiple full charges to both smartphones and tablets and will supply sufficient power to charge batteries in the Sealey 20V, 14V and 12V power tool ranges. Supplies several full charges for smartphones (e.g. iPhone X; seven charges & Samsung Galaxy Note; six charges) or two full charges for your tablet/laptop (based on an 8800mAh battery) as well as many other devices. Supplied with both Micro USB and Type-C charging cables. Includes a small integral worklight.

Inputs:	QC3.0 (1x Micro USB, 1x TYPE-C)
Outputs:	230V~50Hz AC, 2x 12V 10A DC Outputs (120W Max), Standard USB 5V~2.1A, QC3.0 (5V~2.1A, 9V~2.1A, 12V~1.5A), Type-C output(5V~2.1A)
Capacity:	31,200mAh Battery
Accessories:	Micro USB Cable, USB TYPE-C, DC Car Socket Adaptor
Charge Time:	8hr on TYPE-C (9V~2A), 13hr on Micro USB (5V~2A)
Dimensions (W x D x H):	263 x 115 x 40mm



B NEW



C NEW

10W



Charging points.



B-C SEE BELOW

10W Portable Power Banks

Pocket-sized ideal for charging mobile phones whilst on the go. Suitable for both Micro USB and Type-C input cables (Type-C Cable not included). Includes built-in Li-poly battery and battery level indicator. Supplied with Micro USB charging cable.

	B	C
Model No:	SPB101	SPB102
Inputs:	1x 5V/2A Micro USB, 1x 5V/2.4A TYPE - C	1x 5V/2A Micro USB, 1x 5V/2.4A TYPE - C
Outputs:	1x 5V/1A 1x 5V/2.4A	1x 5V/1A 1x 5V/2.4A
Capacity:	10,000mAh	20,000mAh
Accessories:	1x Micro USB Cable	1x Micro USB Cable
Charge Time:	5hr on 5V/2A USB adaptor	10hr on 5V/2A USB adaptor
Dimensions (W x D x H):	138 x 70 x 15.5mm	138 x 70 x 27.7mm

A **160W** **230V**

2 x 12V 10A DC Outputs (120W MAX).

230V~50HZ AC Output.

Charge Indicator.

Textured Grip.

1x Micro USB, 1x TYPE-C Input.

Small Integral Worklight.

Standard USB 5V~2A, QC3.0 (5V~2A, 9V~2A, 12V~1.5A), Type-C Output (5V~2A).

D-F SEE RIGHT

RoadStart® Lithium Jump Starter Power Packs

Easily fits in a glove box or backpack and benefits from being compact and lightweight. Powered by Lithium-ion technology and fully protected against short circuit, overload and reverse polarity. USB port for charging electronic devices and integral LED flashlight. Waterproof to IP66 or IP67, depending on model.



	D	E	F
Model No:	RS600	RS800	RS1200
Capacity:	7.2Ah @ 3.7V or 1.8Ah @ 14.8V	10Ah @ 3.7V or 2.5Ah @ 14.8V	16Ah @ 3.7V or 4Ah @ 14.8V
Voltage:	12V	12V	12V
Auxiliary Output:	USB (x1) - 5V/2.1A	USB (x1) - 5V/2.1A	USB (x2) both - 5V/3A, 9V/2A, 12V/1.5A
Cable & Clamp Length:	385mm	385mm	385mm
Maximum Current:	600A Peak, 300A Cranking	800A Peak, 400A Cranking	1200A Peak, 600A Cranking
Weight:	0.36kg	0.45kg	0.70kg
Size (W x D x H):	85 x 27 x 140mm	88 x 33 x 158mm	100 x 45 x 185mm

A-G SEE BELOW

Cable Reels 230V

A comprehensive range to meet the different requirements of the workshop, site, office or home environments. All models manufactured to comply with the latest BS standards. Four outlets fitted incorporating a thermal trip which cuts supply if cable becomes overloaded.



A BCR10B
10m Cassette Type Cable Reel with Thermal Trip 4 x 230V

Composite reel with fully enclosed cable and 4 x 230V power sockets. Fitted with 3-pin plug and thermal trip. 10m 3 x 1mm² PVC cable. Built-in carry handle.

Supply:	230V
Length:	10m
Cable Section:	3 x 1mm ²
Cable Type:	PVC
Sockets:	4
Thermal Trip:	✓
Drum Size:	Small
Capacity Wound:	720W
Capacity Unwound:	2400W
Plug Type:	3-Pin

B-C SEE BELOW
Box Type Cable Reels with Thermal Trip 4 x 230V

	B	C
Model No:	BCR15CB	BCR25CB
Supply:	230V	230V
Length:	15m	25m
Cable Section:	3 x 1.25mm ²	3 x 1.25mm ²
Cable Type:	PVC	PVC
Sockets:	4	4
Thermal Trip:	✓	✓
Drum Size:	Medium	Medium
Drum Type:	Composite	Composite
Capacity Wound:	1200W	1200W
Capacity Unwound:	3120W	3120W
Plug Type:	3-Pin	3-Pin



D-G SEE BELOW
Cable Reels with Thermal Trip 4 x 230V

	D	E	F	G
Model No:	BCR153T	BCR25	BCR2525	BCR50
Supply:	230V	230V	230V	230V
Length:	15m	25m	25m	50m
Cable Section:	3 x 1.25mm ²	3 x 1.25mm ²	3 x 2.5mm ²	3 x 1.25mm ²
Cable Type:	PVC	PVC	PVC	PVC
Sockets:	4	4	4	4
Thermal Trip:	✓	✓	✓	✓
Drum Size:	Medium	Medium	Medium	Large
Drum Type:	Composite	Composite	Composite	Composite
Capacity Wound:	960W	960W	1440W	960W
Capacity Unwound:	3120W	3120W	3120W	3120W
Plug Type:	3-Pin	3-Pin	3-Pin	3-Pin



A-D SEE BELOW
Cable Reels 230V

A comprehensive range to meet the different requirements of the workshop, site, office or home environments. All models manufactured to comply with the latest BS standards. Four 230V outlets fitted incorporating a thermal trip which cuts supply if cable becomes overloaded. Model No. BCR10G includes two 230V and two USB outlets.

230V Thermal Trip

	A	B	C	D
Model No:	BCR10G	BCR153TG	BCR25G	BCR50G
Supply/Plug Type:	230V/3-Pin	230V/3-Pin	230V/3-Pin	230V/3-Pin
Length:	10m	15m	25m	50m
Cable Section:	3 x 1mm ²	3 x 1.25mm ²	3 x 1.25mm ²	3 x 1.25mm ²
Cable Type:	PVC	PVC	PVC	PVC
Sockets:	2 x 230V, 2 x USB 5V=2.4A	4	4	4
Thermal Trip:	✓	✓	✓	✓
Drum Size:	Small	Medium	Large	Large
Drum Type:	Composite	Composite	Composite	Composite
Capacity Wound/ Unwound:	720W/2400W	1200W/3120W	1200W/3120W	960W/3120W



E-F SEE BELOW

25m Heavy-Duty Cable Reels with Thermal Trip 4 x 230V

	E	F
Model No:	CR25/1.5	CR22525
Supply:	230V	230V
Length:	25m	25m
Cable Section:	3 x 1.5mm ²	3 x 2.5mm ²
Cable Type:	PVC	PVC
Sockets:	4	4
Thermal Trip:	✓	✓
Drum Size:	Medium	Medium
Drum Type:	Composite	Composite
Capacity Wound:	720W	720W
Capacity Unwound:	3120W	3120W
Plug Type:	3-Pin	3-Pin

G-H SEE BELOW

50m Heavy-Duty Cable Reels with Thermal Trip 4 x 230V

	G	H
Model No:	CR50/1.5	CR25025
Supply:	230V	230V
Length:	50m	50m
Cable Section:	3 x 1.5mm ²	3 x 2.5mm ²
Cable Type:	PVC	PVC
Sockets:	4	4
Thermal Trip:	✓	✓
Drum Size:	Large	Large
Drum Type:	Composite	Composite
Capacity Wound:	720W	720W
Capacity Unwound:	3120W	3120W
Plug Type:	3-Pin	3-Pin



A BCR25RCD

25m Cable Reel with Thermal Trip & RCD Plug 4 x 230V

Supply:	230V
Length:	25m
Cable Section:	3 x 1.25mm ²
Cable Type:	PVC
Sockets:	4
Thermal Trip:	✓
Drum Size:	Medium
Drum Type:	Composite
Capacity Wound:	960W
Capacity Unwound:	3120W
Plug Type:	3-Pin



B CR12515

25m Heavy-Duty Cable Reel with Thermal Trip 2 x 110V

Supply:	110V
Length:	25m
Cable Section:	3 x 1.5mm ²
Cable Type:	PVC
Sockets:	2
Thermal Trip:	✓
Drum Size:	Medium
Drum Type:	Composite
Capacity Wound:	660W
Capacity Unwound:	1760W
Plug Type:	Yellow - 16A-2P+E



C WSPC1633U

15m Caravan & Camping Cable Reel with RCD

Caravan and camping cable reel fitted with three UK standard 230V 13A sockets, 2 x 2.1A USB ports and a 2P+E plug 230V 16A. Fitted with a residual current circuit breaker 25A 2-pole and a mini circuit breaker 16A 2-pole. IP44 rated.

Supply:	230V
Length:	15m
Cable Section:	3 x 1.5mm ²
Plug Type:	Blue - 16A-2P+E




D-F SEE BELOW

Retractable Cable Reels 230V

Durable composite housing operated by simple pull and release action. Features integral manual thermal trip switch to prevent overload and LED power indicator. Supplied with single socket outlet.

	D	E	F
Model No:	CRM101	CRM151	CRM251
Voltage:	230V	230V	230V
Cable Length:	10m	15m	25m
Cable Section:	3 x 1mm ²	3 x 1mm ²	3 x 1.5mm ²
Thermal Trip:	✓	✓	✓
Capacity Wound:	1000W	1000W	1000W
Capacity Unwound:	1500W	1400W	3000W
Plug Type:	3-Pin	3-Pin	3-Pin
Power Supply Cable Length:	1.3m	1.6m	1.6m

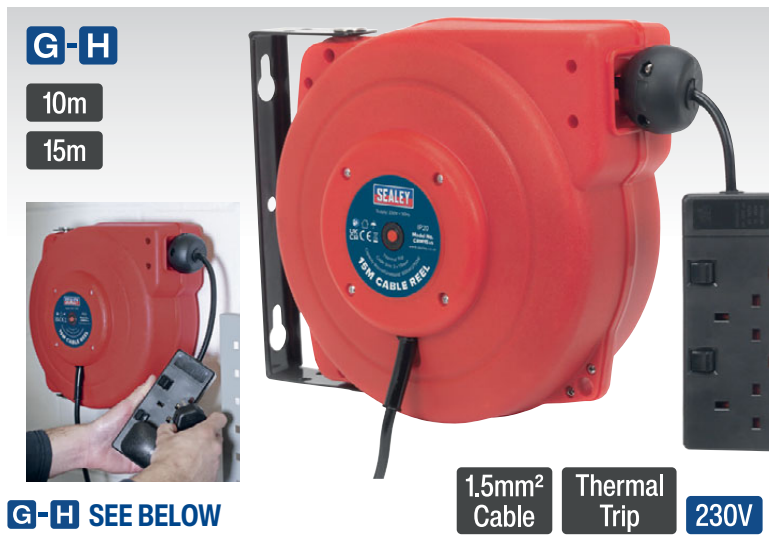

G-H SEE BELOW

Retractable Cable Reels 230V

Hard-wearing, composite cased, retracting electric cable reels operated by simple pull and release action. Features integral manual thermal trip switch to prevent overload. Double socket outlet with individual LED power indicators and rocker on/off switches.

	G	H
Model No:	CRM10	CRM15
Voltage:	230V	230V
Cable Length:	10m	15m
Cable Section:	3 x 1.5mm ²	3 x 1.5mm ²
Thermal Trip:	✓	✓
Capacity Wound:	1000W	1000W
Capacity Unwound:	2750W	2750W
Plug Type:	3-Pin	3-Pin
Power Supply Cable Length:	1.3m	1.3m

A



A EL144USB
1.4m Powercube Extension Cable
4 x 230V & 2 x USB Sockets

Space-saving cube design. Suitable for garage, workshop and office applications. Features 2 x 5V (2.1A) USB sockets and 4 x 230V sockets. Fitted with 3-pin heavy-duty plug. Supplied with bracket, suitable for mounting under desks (covers one socket).

Sockets:	4 x 230V, 2 x USB 5V–2.1A
Cable Section:	3 x 1.25mm ²
Length:	1.4m
Supply/Plug Type:	230V/3-Pin

B



B EL144WC
1.4m Extension Cable Cube 3 x 230V &
3 x USB Sockets & Wireless Charging Pad



Space-saving cube design. Suitable for garage, workshop and office applications. Features 3 x 5V (2.4A) USB sockets and 3 x 230V sockets. Fitted with 3-pin heavy-duty plug. Includes wireless charging pad (5W) suitable for any wireless charging enabled device.

Sockets:	3 x 230V, 3 x USB 5V–2.4A
Cable Section:	3 x 1.25mm ²
Length:	1.4m
Supply/Plug Type:	230V/3-Pin

C



D



C-D SEE BELOW
2.6m Extension Leads with 230V & USB Sockets

Suitable for garage, workshop and office applications. Features 2 x 5V (2.4A) USB sockets and 230V sockets (quantity dependent on model) and an on/off rocker switch. Fitted with 3-pin heavy-duty plug.

	C	D
Model No:	EL32USBW	EL34USBB
Colour:	White	Black
Sockets:	2 x 230V, 2 x USB 5V–2.4A	4 x 230V, 2 x USB 5V–2.4A
Cable Section:	3 x 1.5mm ²	3 x 1.5mm ²
Length:	2.6m	2.6m
Supply/Plug Type:	230V/3-Pin	230V/3-Pin

E

230V



E RCD981
RCD Safety Adaptor 230V

Cuts power automatically if an imbalance is detected between live and neutral (caused by leakage to earth). In the event of general power failure the RCD will not automatically reset meaning anything plugged into it will not automatically restart. No wiring required – plugs straight into 13A socket. No need to remove from socket to reset unit.

Supply:	230V
Maximum Load:	2990W
Maximum Operating Current:	13A
Trip Speed:	50ms
Trip Current:	30mA

F



SMD LED

F WL63/8D
6 SMD LED Dimmable
Rechargeable Dual Mounting
Magnifying Worklight

Powerful 3 dioptre 109mm and 8 dioptre 24mm precision lens gives high quality magnifying capabilities. Features six SMD LEDs producing up to 60 lumens to illuminate the object for improved detailed work. Built-in touch sensitive dimmer switch. Magnifier can detach from its sturdy base and spring clamp to a work bench up to 45mm thick. Ideal for electrical engineers, engravers and fine detail work. Supplied with micro USB cable.

LED Type:	6 SMD
Supply:	5V=1A
Battery:	3.7V 400mAh Li-ion

G



SMD LED

G WL483D
48 SMD LED
Bench Mounting
Magnifying Worklight

Powerful 3 dioptre 120mm precision lens gives high quality magnifying capabilities. Features 48 SMD LEDs to illuminate the object for improved detailed work. Multi-position swing arm allows simple positioning of lamp to suit task. Features a G-clamp base to secure to a workbench or table. Ideal for electrical engineers, engravers and fine detail work.

LED Type:	48 SMD
Supply/Plug Type:	230V/3-Pin
Power Supply Cable Length:	1.7m

H



SMD LED

H WL53/8D
45 SMD LED Dimmable
Dual Mounting Magnifying Worklight

Powerful 3 dioptre 85mm and 8 dioptre 22mm precision lens gives high quality magnifying capabilities. Features 45 SMD LEDs producing up to 550 lumens to illuminate the object for improved detailed work. Includes a built-in touch sensitive dimmer switch. Extremely strong and flexible neck allowing ease of positioning. Features a G-clamp base to secure to a workbench or table. Also includes a sturdy base which the magnifier can sit in. Ideal for electrical engineers, engravers and fine detail work.

LED Type:	45 SMD
Supply/Plug Type:	230V/3-Pin
Power Supply Cable Length:	1.5m



230V

A W1613PS
230V 16A/13A Socket Adaptor
 Socket adaptor with 2P+E plug 16A to 3-Pin standard UK 13A plug. IP44 Rated. Conforms to EN60309 and BS1363.

Plug Type: Blue - 16A-2P+E



230V

B-C SEE BELOW
230V 2P+E Blue Plugs
 230V Plugs, IP44 rated, 16A. 2P+E Connector. Conforms to BS EN 60309.

B Model No:	WP24016
Description:	16A/230V
C Model No:	WP24032
Description:	32A/230V



230V

D-E SEE BELOW
230V 2P+E Blue Sockets
 230V Sockets with 2P+E connectors. IP44 Rated.

D Model No:	WC24016
Description:	16A/230V
E Model No:	WC24032
Description:	32A/230V



230V

F WTWS16A
3-Way Splitter 230V
 3-Way splitter 230V~50Hz, allows splitting of a maximum current of 16A. Fitted with one 2P+E input and three output connectors. IP44 Rated.



230V

G WPS16131
16A/13A Trailing Socket & Cable Set
 Trailing socket and cable fitted with a 230V 13A standard UK socket and 2P+E plug rated at 230V 16A. H05VV-F 3G 1.5mm Section cable, 350mm in length. IP20 Rated.

Length: 350mm Cable
Plug Type: Blue - 16A-2P+E



230V

H WSP1316
13A/16A Trailing Socket & Cable Set
 Trailing socket and cable fitted with a 230V~50Hz 13A standard UK plug and 2P+E socket rated at 230V~50Hz 16A. H05VV-F 3G 1.5mm Section cable, 350mm in length. IP20 Rated.

Length: 350mm Cable



230V

I WPS16132
16A/13A Trailing Twin Socket & Cable Set
 Trailing twin socket and cable fitted with 230V~50Hz 13A Standard UK sockets and 2P+E plug rated at 230V~50Hz 16A. H05VV-F 3G 1.5mm Section cable, 350mm in length. IP20 Rated.

Length: 350mm Cable
Plug Type: Blue - 16A-2P+E



110V

J-L SEE BELOW
Extension Leads

J Model No.	EL15110
Description:	14m 110V 16A 1.5mm
K Model No.	EL25110/16
Description:	14m 110V 16A 2.5mm
L Model No.	EL25110/32
Description:	14m 110V 32A 2.5mm



230V

1.5mm² Cable

M EL1523016
14m Extension Lead 230V 16A 1.5mm²
 Extension cable fitted with 2P+E plug and socket connectors rated at 230V 16A with protective end cover. H05VV-F 3G 1.5mm Section cable. IP44 Rated.

Length: 14m
Cable Section: 1.5mm²
Plug Type: Blue - 16A-2P+E




230V

1.5mm² Cable

N EL15240
14m Extension Lead 240V 13A 1.5mm²
 Extension cable fitted with 13A 240V plug and single 230V socket.

Length: 14m
Cable Section: 1.5mm²
Plug Type: 3-Pin

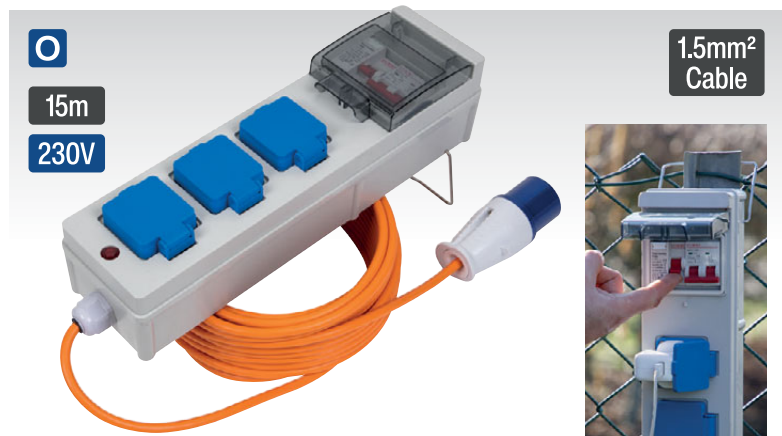

15m

230V

1.5mm² Cable

O WSC16133
15m Caravan & Camping Mains Unit with RCD
 Caravan and camping mains unit fitted with three UK standard 230V~50Hz 13A sockets and a 2P+E Plug rated at 230V~50Hz 16A. Fitted with a residual current circuit breaker 25A 2-pole and a mini circuit breaker 16A 2-pole. IP44 Rated.

Length: 15m
Cable Section: 1.5mm²
Plug Type: Blue - 16A-2P+E





A-C SEE BELOW
110V Portable Transformers

110V Transformers with tool rated performance suitable for intermittent running of power tools and continuous running of lighting products, within specified capacity. IP54 Rated units with case manufactured from GRP and insulated to Class H with thermostatic overload protection. Fitted with flexible 3-core cable.

	A	B	C
Model No:	WST1500	WST3000	WST5000
Power Tool Rating:	1500VA	3000VA	5000VA
Continuous Rating:	900VA	1650VA	2800VA
Sockets:	2 x 16A	2 x 16A	2 x 16A, 1 x 32A
Weight:	11kg	17kg	30.5kg
Plug Type:	3-Pin	3-Pin	3-Pin
Power Supply Cable Length:	1.3m	1.3m	1.7m



D WST5000MV/2
5kVA Portable Vented Transformer
16/32A Outlets

110V Transformer with continuous 3000VA output which is ideal for 110V heaters and power tools that require a continuous load. IP20 Rated unit with steel casing and insulated to Class 1 with ventilated outlets. Fitted with thermal overload protection.

Power Tool Rating:	5000VA
Continuous Rating:	3000VA
Sockets:	1 x 16A, 1 x 32A
Weight:	30.5kg
Plug Type:	3-Pin
Power Supply Cable Length:	1.7m



E-F SEE BELOW
110V 2P+E Yellow Plugs

110V Socket for use with 2P+E connectors. IP44 Rated.

E Model No:	WP11016
Description:	16A/110V
F Model No:	WP11032
Description:	32A/110V



G-H SEE BELOW
110V Yellow Sockets

110V Sockets for use with 2P+E connectors. IP44 Rated.

G Model No:	WC11016
Description:	16A/110V
H Model No:	WC11032
Description:	32A/110V



I WSTWA
110V 3-Way Splitter

110V 2P+E 3-Way Splitter, 16A. IP44 Rated.



J WSSB16
110V 4-Way Splitter Box


4-Way 16A Splitter Box with 2.8m cable and 16A plug. CEE Connector. IP44 Rated.



K WST10000
110V 10KVA Single Phase Portable Transformer
4 x 16A 2 x 32 A Outlets

110V Transformer with tool rated performance suitable for intermittent running of power tools and continuous running of lighting products within specified capacity. IP44 Rated unit with steel case and heavy-duty handles to aid positioning. Fitted with miniature circuit breaker to prevent overload.

Electrical Fuse Rating:	10000VA
Continuous Rating:	7000VA
Sockets:	2 x 32A/110V sockets, 4 x 16A/110V
Weight:	69.5kg

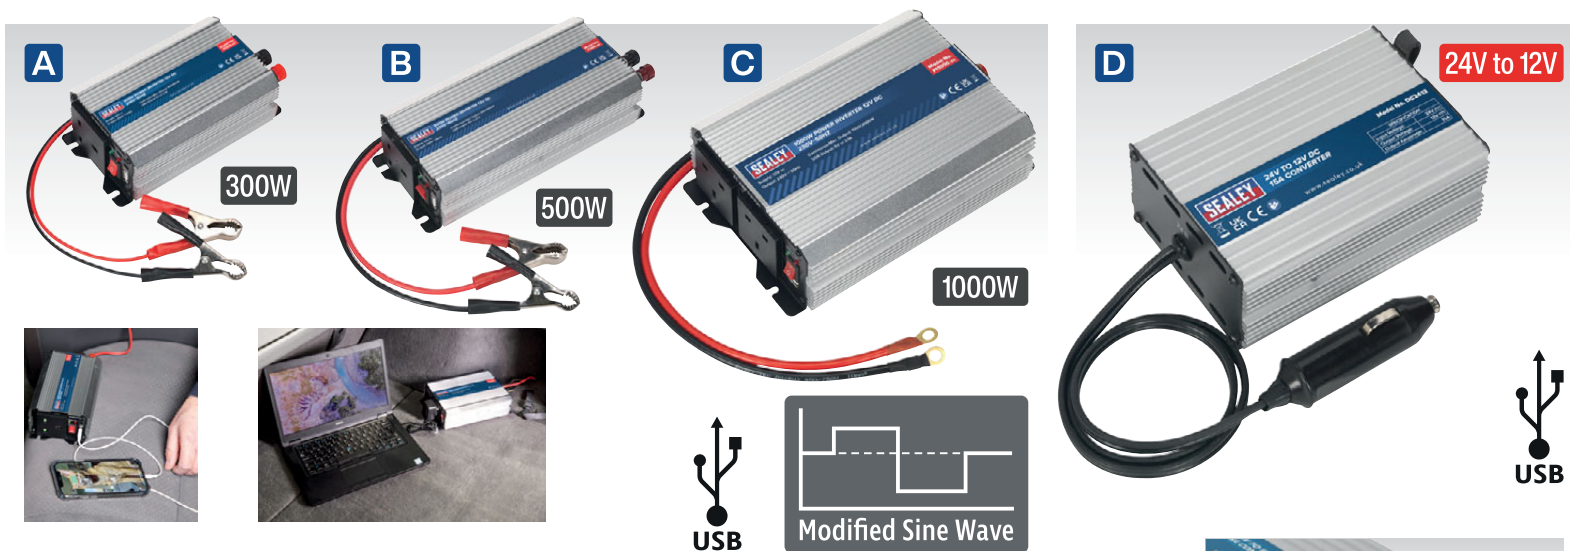

A-C SEE BELOW

12V DC Power Inverters - 230V~50Hz

Supplies continuous smooth 230V power from 12V DC power supply found in cars, caravans, boats and commercials. Suitable for powering small TVs, laptops, power tools and various other electrical equipment within the wattage rating of the inverter. Features a USB port (5V 2.1A) for use on various domestic electronic equipment such as digital cameras and mobile phones. Aluminium case provides durability and maximum heat dissipation. Safety features include automatic overload shut-down, short circuit protection, low voltage alarm, low voltage shut down and overheat shut-down. Supplied with vehicle accessory socket plug and/or battery clips/terminals depending on model.

	A	B	C
Model No:	PI300	PI500	PI1000
Input Voltage:	12V DC	12V DC	12V DC
Output Voltage:	230V AC	230V AC	230V AC
Continuous Output:	300W	500W	1000W
Maximum Output:	600W	1000W	2000W
Output Frequency:	50Hz	50Hz	50Hz
Dimensions (W x D x H):	180 x 95 x 58mm	230 x 95 x 58mm	240 x 160 x 65mm
Supply Connection:	Vehicle Accessory Socket Plug & Battery Clips	Vehicle Accessory Socket Plug & Battery Clips	Battery Terminal Leads
USB Output:	5V=2.1A	5V=2.1A	5V=2.1A

D DC2412

24V to 12V DC 15A Converter

Suitable for commercial vehicles with 24V DC battery supply. Converts down to 12V DC 15A vehicle accessory socket output. Features a low and high voltage alarm for added protection. Additionally includes a 5V USB outlet. Supplied with 550mm vehicle accessory socket plug.

Input Voltage:	24V
Output Voltage:	12V
Output:	15A
Dimensions (W x D x H):	120 x 85 x 50mm
Supply Connection:	24V Vehicle Accessory Socket Plug



E-G SEE BELOW

12V DC Pure Sine Wave Power Inverters - 230V ~ 50Hz

Pure sine wave inverters have been designed to produce the same AC frequency produced on the grid, making them more reliable than traditional inverters, without any fluctuation in power or performance. Units operate from a 12V DC power supply found in cars, caravans, boats and commercials. High performance outlet eliminates electrical interference, reducing noise levels during use. Suitable for powering small TVs, laptops, power tools and various electrical equipment within the wattage rating of the inverter. Includes USB outlet for charging and operating small electric devices. Aluminium case provides durability and maximum heat dissipation. Safety features include automatic overload shut-down and short circuit protection. Supplied with vehicle accessory socket plug and/or battery clips/terminals depending on model.

	E	F	G
Model No:	PSI300	PSI600	PSI1000
Input Voltage:	12V DC	12V DC	12V DC
Output Voltage:	230V AC	230V AC	230V AC
Continuous Output:	300W	600W	1000W
Maximum Output:	600W	1200W	2000W
Output Frequency:	50Hz	50Hz	50Hz
Dimensions (W x D x H):	200 x 110 x 60mm	245 x 110 x 60mm	315 x 140 x 80mm
Supply Connection:	Vehicle Accessory Socket Plug & Battery Clips	Battery Clips	Battery Terminal Leads



A-C SEE BELOW

Power Inverters Modified Sine Wave 12V DC - 230V~50Hz

Supplies continuous smooth 230V power from 12V DC power supply found in cars, caravans, boats and commercials. Features two USB charging ports combined 2.1A and an LCD screen which displays the output wattage, input voltage and battery level. Durable aluminium body with four mounting points for secure installation. Near silent cooling fan for low noise operation. Safety features include overload shutdown, audible low voltage alarm, thermal shutdown and short circuit shutdown. Supplied with 1m battery cables, wired remote control and in-line fuse kit.



Includes wired remote control.

	A	B	C
Model No:	PI1100	PI1500	PI2000
Input Voltage:	12V DC	12V DC	12V DC
Output Voltage:	230V AC	230V AC	230V AC
Continuous Output:	1100W	1500W	2000W
Maximum Output:	2200W	3000W	4000W
Output Frequency:	50Hz	50Hz	50Hz
USB Output:	5V~2.1A (x2)	5V~2.1A (x2)	5V~2.1A (x2)
Dimensions (W x D x H):	297 x 170 x 88mm	351 x 170 x 88mm	390 x 170 x 88mm
Supply Connection:	Battery Terminal Leads	Battery Terminal Leads	Battery Terminal Leads



Features 2 x 230V power outputs and 2 x USB charging ports.



D G1000I

1000W Inverter Generator 230V 2-Stroke Engine

Digital inverter technology provides stable 'clean' output, making the unit suitable for use with sensitive electrical equipment. Automatically adjusts the engine speed to precisely match the load, which allows the generator to run quieter whilst increasing fuel efficiency and lengthening engine life. Electronic ignition and a light pull recoil for easy start-up. Electronic safety overload system. Easy to carry at just 8.7kg. Fitted with a 230V socket.

Motor Power:	1.1kW/1.47hp
Motor Type:	2-Stroke Petrol
Fuel:	Unleaded 95 RON
Output:	230V~50Hz
Current Rating:	3.6A
Continuous Power Rating:	800W
Maximum Power Rating:	1000W
Fuel Tank:	3.5L
Maximum Running Time:	3.2hr
Noise Rating:	95dB(A)
Dimensions (W x D x H):	295 x 250 x 345mm



E G2000I

2000W Inverter Generator 230V - 4-Stroke Engine

Digital inverter technology provides pure sine wave electric power suitable for use with sensitive electrical equipment. Lightweight, easily lifted and fully portable. Eco mode set-up allowing the generator to run quieter (60dB @7m), increase fuel efficiency (4L fuel tank will last 6 hours) and reduce emissions. Features light recoil start, fuel gauge, auto voltage adjuster, low oil alarm and electric circuit protector. Fitted with two 230V sockets and 12V DC 8.3A port.

Motor Power:	2.2kW/3hp
Motor Type:	4-Stroke Petrol
Fuel:	Unleaded 95 RON
Output:	230V AC~50Hz/12V DC
Current Rating:	8.3A
Continuous Power Rating:	1600W
Maximum Power Rating:	2000W
Fuel Tank:	4L
Maximum Running Time:	6hr
Noise Rating:	95dB(A)
Dimensions (W x D x H):	465 x 280 x 425mm

A

E10 Compatible



2200W



A G2201

2200W 230V Generator 6.5hp - 4-Stroke Engine

Heavy-duty frame design provides full protection and portability. Suitable for running power tools and lighting units. Long running with up to 13 hours on a full tank. Fitted with two 230V 13A sockets. Powerful and reliable generator. Smooth running unit fitted with anti-vibration engine mounts. Features low oil warning light, overload protection and fuel gauge.

B

E10 Compatible



3100W



B G3101

3100W 230V Generator 7hp 4-Stroke Engine

Heavy-duty frame design features two wheels and a large handle, these provide full protection and portability. Suitable for running power tools and lighting units. Long running with up to 11 hours on a full tank. Fitted with two 230V 13A sockets. Powerful and reliable generator. Smooth running unit fitted with anti-vibration engine mounts. Features low oil warning light, overload protection and fuel gauge.



C

E10 Compatible



5500W



C G5501

5500W 110/230V Generator 13hp - 4-Stroke Engine

Heavy-duty frame design features two wheels and a large handle, these provide full protection and portability. Suitable for running power tools and lighting units. Long running with up to 11 hours on a full tank. Fitted with 2 x 230V 16A and 2 x 110V 16A sockets. Powerful and reliable generator. Smooth running unit fitted with anti-vibration engine mounts. Features low oil warning light, overload protection and fuel gauge.

D

3500W

E10 Compatible



D G13500

3500W 230V Inverter Generator - 4-Stroke Engine

Heavy-duty frame provides full protection and incorporates carry handles for portability. Suitable for running sensitive electrical equipment. Produces a clean AC current to match the load. Long running time - up to 8 hours on a full tank. Fitted with two 230V 13A sockets. Increased fuel efficiency compared to standard generators. Powerful and reliable inverter generator. Features oil warning light, overload indicator and sight glass to monitor fuel level.


Motor Power:	3.5kW
Motor Type:	4-Stroke Petrol
Output:	230V~50Hz
Current Rating:	15.2A
Continuous Power Rating:	3200W
Maximum Power Rating:	3500W
Fuel Tank:	13L
Maximum Running Time:	8hr
Noise Rating:	95dB(A)
Dimension (W x D x H):	440 x 520 x 470mm

	A	B	C
Model No:	G2201	G3101	G5501
Motor Power:	4.9kW/6.5hp	5.2kW/7hp	9.7kW/13hp
Motor Type:	4-Stroke Petrol	4-Stroke Petrol	4-Stroke Petrol
Output:	230V~50Hz	230V~50Hz	230V/110V~50Hz
Current Rating:	8.7A	11.3A	16/16A
Continuous Power Rating:	2000W	2600W	5000/3500W
Max. Power Rating:	2200W	3100W	5500/4000W
Fuel Tank:	15L	15L	25L
Max. Running Time:	13hr	11hr	11hr
Noise Rating:	94dB(A)	96dB(A)	96dB(A)
Dimensions (W x D x H):	595 x 435 x 435mm	625 x 475 x 475mm, (with handle and wheels): 860 x 530 x 520mm	690 x 545 x 540mm, (with handle and wheels): 980 x 625 x 710mm



3500W

12V



A G3500i
3500W Inverter Generator 230V - 4-Stroke Engine

Digital inverter technology provides pure sine wave electric power suitable for use with sensitive electrical equipment. Easily moveable with folded handle and sturdy wheels making it portable once on site. Eco mode set-up allowing the generator to run quieter (73dB LPA), increase fuel efficiency (8L fuel tank) and reduce emissions. Features both pull cord and switch start, auto voltage adjuster, fuel gauge sensor, electric circuit protector and ESC smart control allowing the speed of the engine. Fitted with two 13A sockets, 12V DC 8.3A port and 2 USB charging ports. Supplied with tool kit to access battery, funnel, connector and clips which can charge a 12V car battery.

Motor Power:	4.1kW/3600rpm
Motor Type:	4-Stroke Petrol
Output:	230V~50Hz / 12V DC / 5V USB
Current Rating:	13.9A
Continuous Power Rating:	3200W
Maximum Power Rating:	3500W
Fuel Tank:	8.3L
Maximum Running Time:	Rated Load - 5±0.5hrs 50% load - 8.5±0.5hrs
Noise Rating:	73dB(LPA)
Dimensions (W x D x H):	590 x 456 x 511mm



PLUGS AND SOCKETS

For our full range of 110V and 230V Plugs, Sockets and Adaptors, see pages 1182 to 1183.



B

13hp

6000W

12V



B GG7500
6000W 110/230V Generator 13hp

Heavy-duty industrial frame design provides full protection and aids portability. Suitable for running power tools and lighting units etc. Fitted with automatic voltage control which protects the unit and provides higher efficiency and a long running time of up to 10 hours on a full tank. Fitted with 12V battery charging outlet, 230V and 110V sockets. Powerful and reliable generator fitted with maintenance-free brushless alternator. Smooth running unit fitted with anti-vibration mountings. Low oil cut-out feature and fuel gauge.

Motor Power:	9.7kW/13hp
Motor Type:	4-Stroke Petrol
Output:	230V/110V~50Hz / 12V DC
Current Rating:	22A/45A/8.3A
Continuous Power Rating:	5000W
Maximum Power Rating:	6000W
Fuel Tank:	25L
Maximum Running Time:	10hrs
Noise Rating:	96dB(A)
Dimensions (W x D x H):	713 x 541 x 569mm



C NEW

5000W

12V



C DG5000
5000W 110/230V Generator - 4-Stroke Engine

Heavy-duty enclosed design features four wheels, a large handle at either end and lifting eye for portability. Suitable as a backup electrical supply for your business and home. Ideal for running power tools and lighting units. Long running - up to 7.5 hours on a full tank. Fitted with one 16A 110V, one 32A 110V and one 32A 230V socket. Powerful and reliable key start generator. Features low oil warning light, overload protection and fuel gauge. Overall dimensions: 940 x 540 x 705mm. Noise Rating: 97dB @ 7m. Continuous/Maximum Power Rating: 4600/5000W. Supplied with tool bag including plugs to fit sockets, screwdriver, two spanners, 12V cable with plug clips and two start keys. This item is heavy. Extra assistance must be provided at the delivery point to help ensure its safe delivery.

Motor Power:	4.6kW/3000rpm
Motor Type:	4 Stroke Diesel
Output:	110/230V
Current Rating:	8A
Continuous Power Rating:	4600W
Maximum Power Rating:	5000W
Fuel Tank:	14.5L
Maximum Running Time:	7.5hrs
Noise Rating:	97dB(A)
Dry Weight:	141kg
Dimensions (W x D x H):	940 x 540 x 705mm